


110



Norfolk Southern Corporation
Communications and Signal Department
99 Spring Street, S.W.
Atlanta, Georgia 30303

B. L. Sykes
Chief Engineer
C&S Engineering
404/529-2105

X-12194 April 29, 2004

T04-0064

061-04.445; 061-04.501;
061-04.502; 061-04.503;
061-04.504

Mr. Michael E. Stead
Railroad Safety Program Administrator
Illinois Commerce Commissioner
527 East Capitol Avenue
P. O. Box 19280
Springfield, IL, 62794-9280

534390R

RECEIVED
MAY 6 2004

Illinois Commerce Commission
RAIL SAFETY SECTION

Dear Mr. Stead:


Please reference the Illinois Commerce Commission letter of December 23, 2003, regarding Stipulated Agreement No. 1068 for the installation of automatic warning devices at the Fifth Street, Entrance Avenue, Schuyler Avenue, Indiana Avenue (IL 50) and Greenwood Avenue highway rail grade crossings of the Norfolk Southern Railway Company's track, all located in the City of Kankakee, Kankakee County, IL, designated at crossings AAR/DOT 534 393L, MP: 101.41-5E; AAR/DOT 534 392E, MP: 101.27-5E, AAR/DOT 534 391X, MP: 100.74-5E; AAR/DOT 534 390R, MP: 100.71-5E; and AAR/DOT 534 388P, MP: 100.51-5E, respectively.

We are providing to you two copies each of the detailed estimate, material list and preliminary engineering for these projects. Included are an estimate, material list and preliminary sketch for constant warning equipment to be installed and maintained by the Canadian National Railway that includes the starts for Schuyler Avenue, Entrance Avenue and Indiana Avenue. The Canadian National Railway's estimate was not included in the original agreement or order and will need to be included as an estimated cost of these projects reimbursable by the state/city.

Also attached are the original and two (2) duplicates of the FORM 3 for this project.

Please advise if additional information is needed to assist in the preparation of this project for installation.

Sincerely,


B. L. Sykes

Attachment(s)

BLS\rhr\gbb\rd\rjs

Cc: Mr. T. W. Ambler, NS Corp., Norfolk, VA - w/copy of FORM 3
Ms. Cheryl Cathey, IL DOT - w/plans, material list and estimate

STATE OF ILLINOIS
ILLINOIS COMMERCE COMMISSION

ORIGINAL

RECEIVED
MAY 6 2004

Petition for permission to make a major change in crossing protection, or to install new protection under 92 Illinois Administrative Code 1535.400 (d).

Illinois Commerce Commission
RAIL SAFETY SECTION

Date: April 29, 2004

To the ILLINOIS COMMERCE COMMISSION:

The petitioner Norfolk Southern Railway Company shows

- (1) That it is a railroad company operating a line of railroad in the State of Illinois.
- (2) That petitioner proposes and hereby makes an application for authority to make a major change in crossing protection or to install new protection under 92 Illinois Administrative Code 1535.400(d) adopted by this Commission.
- (3) That the location of the crossing, nature of protection now established and proposed protection to be established, and other pertinent facts in connection therewith, are set forth in the statement attached to and forming part of this petition.
- (4) That petitioner's reasons and purpose, with reference to its said proposal are to:

Installation of Flashing Light Crossing Signals with Gates and 12" lenses. Front and back lamp

assemblies on both signal masts at: Indiana Avenue in Kankakee, Kankakee County, Illinois,

MP. KS-100.71, DOT: 534 390R

File No. 061-04.445

Project No. 04.0401

- (5) That the facts set forth in this petition and in the statement and plans or plats attached thereto, are, all of them, true and correct to the best of petitioner's knowledge and belief.

WHEREFORE, the petitioner prays that the Commission will, if deemed desirable by the Commission, set the aforesaid matter for a hearing, and that the Commission enter an order or adopt at resolution consenting to and granting authority for the making of the said proposed changes in or additions to the crossing protection.

Norfolk Southern Railway Company

By R. H. Ray
R. H. Ray, Administrator
Highway Grade Crossings

Thomas W. Ambler
(Attorney for Petitioner)

Norfolk Southern Corporation
Three Commercial Place
Norfolk, VA 23510-2191
(Attorney's Address)

DOCKETED

Statement, attached to and part of an application for permission to make a major change in crossing protection or to install new protection, under 92 Illinois Administrative Code 1535.400(d).

1. Name of Railroad Company: Norfolk Southern Railway Company
2. Crossing Number: 534 390R
3. Village or City: Kankakee
4. Name of Street or Highway: Indiana Ave.
5. Public Agency Maintaining Highway: City
6. Protection now established:
- Flashing Light crossing Signals with Reflectorized Cross Buck and Bell.
7. Protection desired:
- Automatic Flashing Light Warning Devices with Gates and Bell. Train Detection Equipment
controlled by Constant Warning Time Circuitry.
8. Number of main tracks One Other tracks None
9. Number of passenger movements:
- 6 a.m. to 6 p.m. None 6 p.m. to 6 a.m. None
10. Number of freight train movements:
- 6 a.m. to 6 p.m. Eight 6 p.m. to 6 a.m. Six
11. Approximate number of switch movements:
- 6 a.m. to 6 p.m. Three 6 p.m. to 6 a.m. Two
12. Maximum speed of trains at crossing on each track in each direction:
- North/East 25 M.P.H.
- South/West 25 M.P.H.
13. Passenger platforms served by tracks within the limits of track circuits, if any None

14. Where automatic signals or gates are proposed, approximate number of train or engine movements daily which would cause false indications or operation:

None

15. Nature and approximate amount of street or highway traffic over crossing:

5,100 A.A.D.T. including Trucks and Buses

16. In addition to the information listed hereinbefore in Form 3, attach a track plan or plat of the proposed crossing. This plan should show:

- (a) Width and surface of highway.
- (b) Highway intersections (including private driveways to be so indicated) and location of established highway signs or signals within 100 feet of crossing.
- (c) Location of tracks, switches and other railroad facilities such as block signals, etc. within limits of track circuits, present and/or proposed.
- (d) Where automatic protection is proposed, show proposed location of signals (side lights, cantilevers, etc., if any).
- (e) Show the length of each operating track section within the control limits of the crossing protection and its function.

ADDITIONAL INFORMATION

Drawing attached for question no. 16

(File Original and Two Duplicates)

VERIFICATION

I, R. H. Ray, first being duly sworn upon oath depose and say that I am
Administrator – Highway Grade Crossings, of Norfolk Southern Railway Company, a
Virginia corporation; that I have read the above and foregoing petition by me subscribed and know the
contents thereof; that said contents are true in substance and in fact, except as to those matters stated upon
information and belief, and as to those, I believe same to be true.


Administrator - Highway Grade Crossings

Subscribed and sworn to before me this 29 th.

day of April, 2004.




Notary Public - Georgia

My Commission Expires: _____

Exhibit 4, P7

TO HENNEPIN

TO NIPSCO

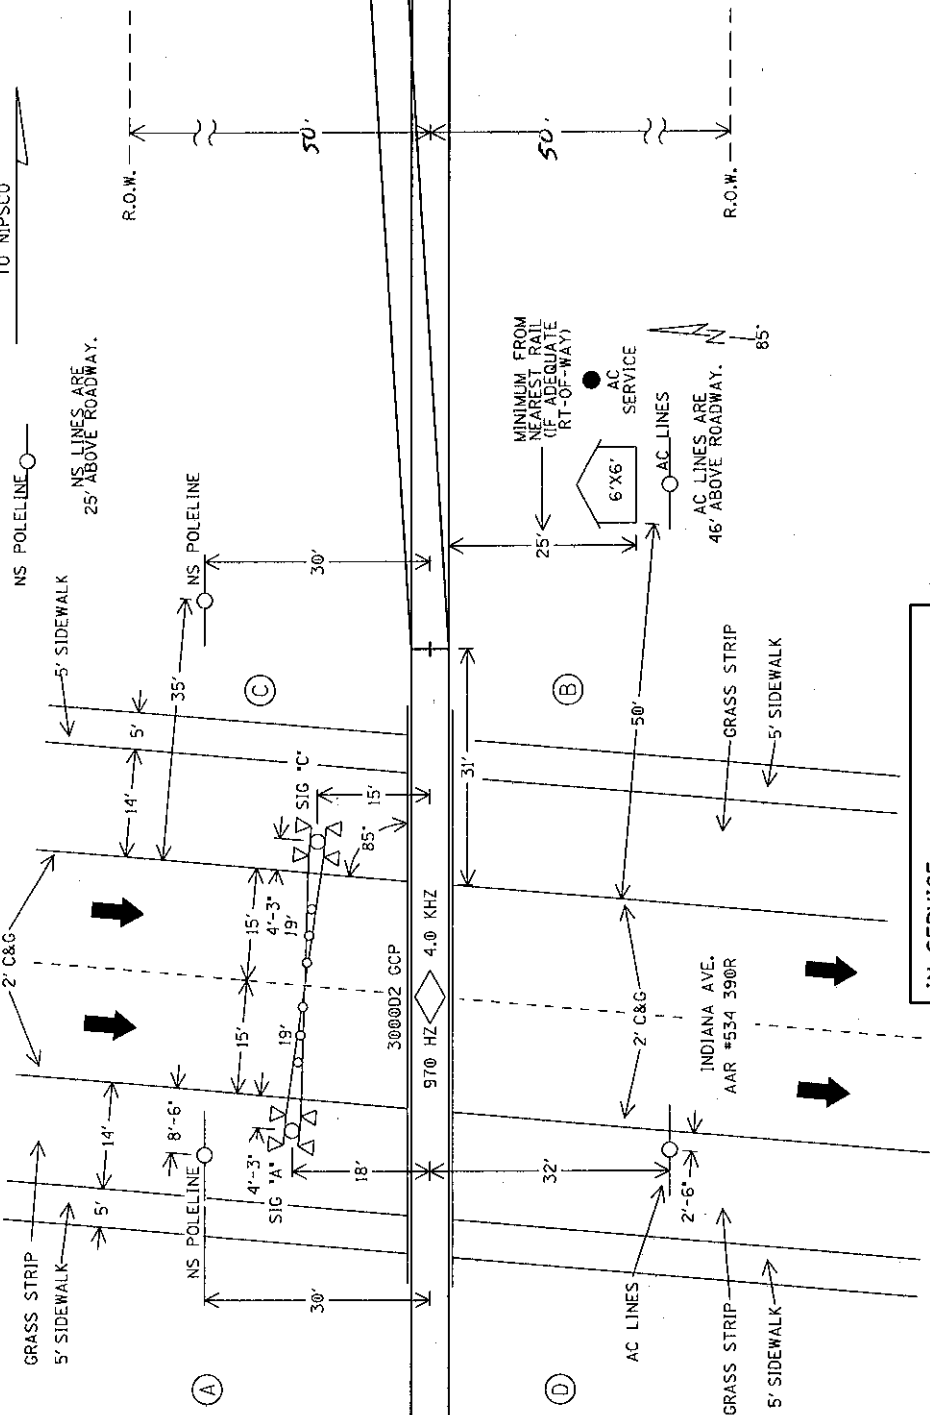

APPROACH LENGTHS ALLOW FOR:	
TIME IN SECONDS	CWT
E.B./W.B. APPROACH	20
STANDARD MUTCD MIN. TIME	30
DESIGNED WARNING TIME	5
EQUIPMENT RESPONSE TIME	35
TOTAL TIME	25
MAX. SPEED (M.P.H.)	1286
APPROACH DISTANCE (FEET)	


NOTES:

1. MAX. TRAIN SPEED 25 M.P.H.
2. LATITUDE N 41° 07' 47" LONGITUDE W 87° 51' 33" ELEVATION 594'
3. SIGNAL 'A' TO HAVE BELL.
4. LOCATE U/G UTILITIES & CABLE BEFORE DIGGING.
5. CROSSING LOCATED IN KANKAKEE COUNTY.
6. NEAREST STREET ADDRESS IS 782 INDIANA AVE.
7. NEAREST INTERSECTING STREET IS E. WILLOW
8. DISTANCE TO NEAREST INTERSECTING STREET IS 170 FT.

(A) (B) (C) (D) = QUADRANT MARKERS

SCALE: 1" = 20'		PROJECT #04.0401	LAYOUT	FILE #061-04.445
DESIGNED BY: KSW 102-25-04		NS NORFOLK SOUTHERN		
DRAWN BY: SSC 102-25-04		OFFICE OF ASST. VICE PRESIDENT COMM. & SIGNAL, ATLANTA, GA. M.P.: KS-100.71		
CHECKED BY: LAR 103-08-04		MISS, IL TO NIPSCO, IN KANKAKEE, IL FLGS AT INDIANA AVE.		
IN SERVICE		FILE NO.	KANKAKEE BRANCH	R-
REVISION/INITIALS		CADD OR DWG. NO.	31231007.01	SHEET 1 of 19
PROPERTY		PENNSYLVANIA R.R.		

IN SERVICE	SIGNED	DATE
<input type="checkbox"/> S&E ENGINEERING COPY		
<input type="checkbox"/> CONSTRUCTION OFFICE COPY		
<input type="checkbox"/> RETURN TO S&E ENG. AFTER COMPLETION		
<input type="checkbox"/> FIELD COPY		
<input type="checkbox"/> RETURN TO CASE AFTER COMPLETION		
<input type="checkbox"/> PROJECT ENGINEER COPY		

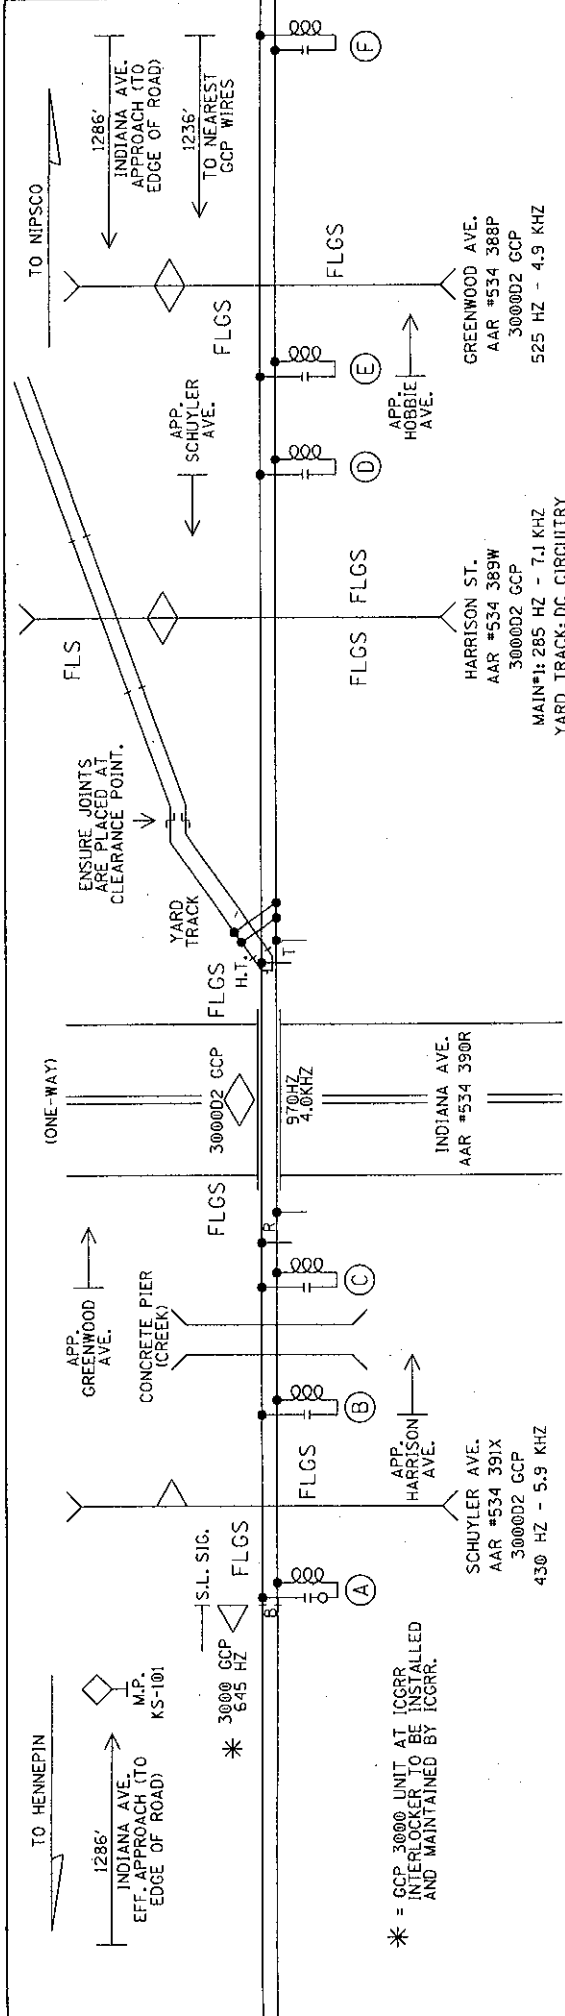

1242'	860'	817'	725'	546'	479'	81'	65'	0'	51'	65'	130'	166'	407'	489'	1152'	1221'
									P.S.	P.F.						

- (A) MF-NBS 62775-3497 (970 HZ) W/ INDUCTOR 8V617-4000
- (B) MF-NBS 62775-1543 (285 HZ)
- (C) MF-NBS 62775-3497 (525 HZ)
- (D) MF-NBS 62775-1543 (430 HZ)
- (E) NBS (151 HZ)
- (F) MF-NBS 62775-3497 (970 HZ)

PROFILE

E-NBS (151 HZ)	E-MF-NBS 62775-3497 (970 HZ)	REVISION INITIALS				PROPERTY PENNSYLVANIA R.R.	DESIGNED BY:	NS NORFOLK SOUTHERN																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																							
							KSW 02-25-04	OFFICE OF ASS'T. VICE PRESIDENT COMM. & SIGNAL, ATLANTA, GA. M.P.: KS-100.71																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																							
							DRAWN BY:	SSC 02-25-04																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																							
							CHECKED BY:	LAR 03-08-04																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																							
							IN SERVICE:	FILE NO. KANKAKEE BRANCH																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																							
																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																															</

* = GCP 3000 UNIT AT ICORR INTERLOCKER TO BE INSTALLED AND MAINTAINED BY ICORR.

Detailed Estimate for Grade Crossing Warning Devices

City/State: KANKAKEE, IL
MilePost: KS-100.71
State Proj. No.: STPRRP-000S
S&E Proj. No.: 04.0401
Man Days: 120

Road: INDIANA AVE.
DOT/AAR: 534390R
County: KANKAKEE
AFE: F01951
File Number: 061-04.445

*****Purchases - Other*****

Meals and Lodging:	\$10,450.00	
Rental of Equipment:	\$22,850.00	
(2 Trucks, 1 Backhoe w/ Trailer and 1 Pipe-Pusher for 30 Days)		
Construction Supervision Vehicle:	\$430.00	
Contingencies:	\$600.00	
Purchases - Other Total:		\$34,330.00

***** Material and Additives*****

Material Cost:	\$67,390.00	
Sales and Use Tax:	\$3,370.00	
Material Handling Freight:	\$3,370.00	
Material Total:		\$74,130.00

*****Labor and Additives*****

Labor Cost:	\$26,880.00	
(4 man crew at \$896.00 a day for: 30 days)		
Payroll Tax & Overheads:	\$23,270.00	
Preliminary Engineering:	\$8,300.00	
Construction Supervision:	\$7,590.00	
Labor Total:		\$66,040.00
Subtotal:		\$174,500.00
Credit: (Salvage/Scrap)		\$0.00
Project Total:		\$174,500.00

Estimated on: 19-Apr-04

Estimated by: ndney

Estimate valid for 1 year from date of estimate

Do not substitute items without permission from S & E Engineering

City:	KANKAKEE
Road:	INDIANA AVE.
Milepost:	KS-100.71
Drawing Number:	31231007
State Project Number:	STPRRP-000S
County:	KANKAKEE
A A R Number:	534390R
Project Number:	04.0401
File Number:	061-04.445
A F E Number:	F01951
Store Number:	06110
Supervisor:	J.W. WILSON
Tax Code:	
Vendor to supply the following copies after pricing: 1 Set - Material Management with original invoice 2 Sets - with plans shipped in car with material 1 Set - S&E Gen. Supt. Construction w/ copy of invoice	

19-Apr-04

Exh B-4, p 2

Location: KANKAKEE			IL	S&E Proj. No.: 04.0401	AFE No.: F01951	Drawing No.: 31231007	Page 1/4		
Store No.: 06110			P.O. Number:		Date Required:	Date Shipped:	Vendor : Safetran Systems Corp.		
Qty.	Class-Item-CD	U/I	Price per Item	Total Price	Item Description	Quantity Shipped	Quantity Installed Date Quan.	Quantity Returned (Credit) Date Quan.	Special Instructions
3	670-360693-4	EA	\$4.82	\$14.46	AAR/DOT NUMBER PLATE/DECAL, ORDER 3 PER PROJECT. 60 DAY LEAD TIME. SUPPLIED BY S'TRAN.				
1	165-006505-4	EA	\$1,028.00	\$1,028.00	AC SERVICE, COMPLETE LESS METER BASE, ASSEMBLED ON 30' POLE				
2	670-001404-4	EA	\$326.77	\$653.54	ARM, GATE FIBERGLASS-ALUMINUM 25-31 FT. L&W OR US&S OR SAFETRAN 076600-320017 OR				
2	670-119241-4	EA	\$30.60	\$61.20	ARRESTOR, LIGHTNING HEAVY DUTY CLEAR VIEW SAFETRAN 022585-1X				
13	105-871901-4	EA	\$154.22	\$2,004.81	BATTERY,GNB 265AH MODEL 50A11 SINGLE CELL 2.25 VOLTS				
1	670-503047-4	EA	\$185.75	\$185.75	BELL, CROSSING ELECTRONIC GENERAL SIGNAL, EB-3-360-5 CR 02-044350				
2	670-980689-4	EA	\$63.71	\$127.41	BRACKET HIGH WIND, (RIGID 3'), WIG- 191036, WALRUS TUSK TYPE				
2	670-561375-4	EA	\$1,201.20	\$2,402.40	BRACKET, GATE SAVER, NEG385102GS, SPRING LOADED SWING AWAY ADAPTER FOR FIBERGLASS/ALUMINUM GATES, USE WITH GATE 28' AND LESS				
400	465-292862-4	LF	\$1.00	\$401.16	CABLE, U-2-6 TWISTED, S-23 OKONITE 113-12-3933 SOLID TINNED CONDUCTOR				
1100	465-292945-4	LF	\$1.35	\$1,485.99	CABLE, U-5-14, S-54 OKONITE 206-14-6885				
400	465-292929-4	LF	\$3.00	\$1,199.44	CABLE, U.G. 5 COND. NO. 6 AWG SOLID COPPER CABLE TO MEET NS CORP. SPEC. FOR SIGNAL				
400	465-939422-4	LF	\$2.56	\$1,023.40	CABLE, UG 12 CONDUCTOR NO 14 AWG SOLID EACH CONDUCTOR WITH 5/64 IN INSULATION 10 MIL				
300	465-277674-4	FT	\$2.80	\$841.23	CABLE, UG 3CD NUMBER 6 FOR HIGH CURRENT AC POWER OKONITE 206-11-6 243				
120	165-544477-4	FT	\$2.00	\$239.47	CONDUIT, 4"x10' PVC, SCHEDULE 80 BELL CONNECTOR AT ONE END, 1/2 PT. GLUE IN KIT 670-123298-4				

APPROVED BY STATE	APPROVED BY RAILROAD	CAR NUMBER	SEAL NUMBER
-------------------	----------------------	------------	-------------

7015-8 Yx=

Drawing No.: 31231007

AFE No.: F01951

S&E Proj. No.: 04.0401

IL

Location: KANKAKEE

Vendor: Safetran Systems Corp.

Date Shipped:

Date Required:

P.O. Number:

Store No.: 06110		Class-Item-CD		UI	Price per Item	Total Price	Item Description	Quantity Shipped	Quantity Installed			Quantity Returned (Credit)	Special Instructions
Qty.									Date Quan.	Date Quan.	Date Quan.		
2	670-090450-4			EA	\$49.62	\$99.25	CONNECTOR, WELDED FAR RAIL HARMON A1000-2W						
2	670-486846-4			EA	\$40.66	\$81.32	CONNECTOR, WELDED NEAR RAIL HARMON A1000-1W						
2	670-793404-4			EA	\$838.38	\$1,676.76	COUNTERWEIGHT PKAGE, 17-24' GATE S'TRAN S. MECH ONLY, STAINLESS, TO INCLUDE HUB, SUPPORT ARMS						
4	670-760012-4			EA	\$34.90	\$139.59	COVER, FOR 1 WAY FLASHING LIGHT ASSY, 18 OZ. BLACK VINYL COATED NYLON. ==== TO COVER 2 LAMPS====						
1	670-986650-4			EA	\$361.26	\$361.26	DISPOSAL, CONSTRUCTION DEBRIS AND CLEANING X'ING EQUIPMENT CONTAINER						
1	670-000004-4			EA	\$281.44	\$281.44	FCC LICENSE FOR MONITOR/RADIO						
6	670-000003-4			EA	\$255.85	\$1,535.10	FILL/STONE #57, QUANTITY IS BASED ON TRUCK LOAD PLUS DELIVERY COST						
2	670-015231-4			EA	\$381.69	\$763.37	FOUNDATION, DIXIE, S-2 GATE 56" ASSEMBLED						
1	670-468243-4			EA	\$36.84	\$36.84	INDUCTOR, SIMULATED TRACK SAFETRAN 8V617-400						
1	670-477991-4			EA	\$292.81	\$292.81	KIT, GROUNDING ASSY FOR AL I/S INCLUDES 8 GRD RDS, 200#4 WIRE, 12 4 WIRE ONE-SHOTS, ERICO SBK206						
1	670-123298-4			EA	\$256.93	\$256.93	KIT, HARDWARE SUPPLIES REQUIRED X'ING PKAGES. WEB CONNECTORS FOR SHUNT(8EA) TAPE, AMP'S, P'GUM PAINT, SLEEVES, TAGS, GLUE, 100 EA WHITE TAGS,)NE CAN BLUE MARKING PAINT ETC....						
2	670-764166-4			EA	\$907.09	\$1,814.18	LAMP ASSY, 5" MAST MTG. 2W IND. 20" BKGRD, FLX-12 W/BULB S'TRAN #042003-487XNS						
6	165-643547-4			EA	\$8.43	\$50.60	LAMP, 18 WATT 10 VOLT S-11 SC BAY 18S11/1SC CLEAR RWY SIGNAL UJ-71463 GE						
2	670-440826-4			EA	\$1.01	\$2.03	LINK, SAFETRAN 024620-1X INSL TESTING COMP 1 IN CENTER SIGNAL CIRCUITS CR 02-286662						

SEAL NUMBER

CAR NUMBER

APPROVED BY RAILROAD

APPROVED BY STATE

Ex 13-4, P4

Exhibit B-4, P.5

Location: KANKAKEE		IL	S&E Proj. No.: 04.0401		AFE No.: F01951	Drawing No.: 31231007	Page 3/4		
Store No.: 06110		P.O. Number:		Date Required:		Date Shipped:		Vendor : Safetran Systems Corp.	
Qty.	Class-Item-CD	UI	Price per Item	Total Price	Item Description	Quantity Shipped	Quantity Installed Date Quan.	Quantity Returned (Credit) Date Quan.	Special Instructions
4	255-590880-4	EA	\$15.62	\$62.47	LOCK, AMERICAN LOCK MODEL H-10KA KEYPED ALIKE TO PRIVATE KEYWAY D456 AND STAMPED "NS SIG"				
2	670-637778-4	EA	\$1,055.55	\$2,111.09	MAST, 5" ALUMINUM 13'10" WITH DOUBLE JCT. BOX BASE. S'TRAN P# 070519-11AX.				
2	670-521147-4	EA	\$2,932.81	\$5,865.62	MECHANISM, GATE MODEL S40, WITH CONTACT HEATER, COMPLETE W/RELAY S'TRAN # 074000-W00090				
4	670-001347-4	EA	\$57.98	\$231.90	PACKAGE, HARDWARE SIGN 5 IN. MOUNTING, SERRMI A1250-5, HARMON @200965-000, OR				
1	255-646807-4	EA	\$9.49	\$9.49	PADLOCK, SAFETRAN PART NO. 030399-29X SCREW TYPE FOR CIR CONTROLLER AND BTY. BOX				
1	670-555609-4	EA	\$41.11	\$41.11	PLUGBOARD, TYPE B-1 GRS A62-506 OR HARMON @7062-506 OR				
1	165-902002-4	EA	\$308.00	\$308.00	PROTECTOR, SURGE 120/240VAC, ERICO P/N EPD120/240TDFL				
5	465-002899-4	EA	\$20.88	\$104.39	REEL, CABLE DISPOSABLE FOR CROSSING SIGNAL PACKAGES				
1	670-742096-4	EA	\$38.50	\$38.50	RELAY INTERFACE PROBE, ULTRATECH PN 16031-00				
1	670-707995-4	EA	\$356.29	\$356.29	RELAY, TYPE B1, NEV LINE, 900 OHMS., 008 AMPERES GRS A62-308 OR SAFETRAN @400003				
1	670-391911-4	EA	\$5,329.57	\$5,329.57	SEARII AUTOMATED INSPECTOR SYSTEM KIT, w/ 1- ILOD, 1-BSX, 2-GTS, 2- MTSS, 1-GFT, 1-VHFC, 2- RECORDER INTERFACE MODULE, 1- ECHELON CONNECTOR				
1	670-281280-4	EA	\$7,006.00	\$7,006.00	SHELTER BARE 6X6, ALUMIN, FARADAY, W/CABLE CHUTES BEHIND TERMINAL BOARD, W/GEN. CONN. W/ADJUSTABLE PIERS, ,SAFTETRAN P/N 058400-66-78A				
2	670-586967-4	EA	\$34.74	\$69.49	SHUNT COVER W/LAG SCREWS, 19"X19", SERRMI #40271, ORDER 1 PER SHUNT				
2	670-688850-4	EA	\$370.27	\$740.53	SHUNT, MULTI-FREQ. #62775-3497 SAFETRAN NARROW BAND				

APPROVED BY STATE	APPROVED BY RAILROAD	CAR NUMBER	SEAL NUMBER
-------------------	----------------------	------------	-------------

Location: KANKAKEE		IL	S&E Proj. No.: 04.0401		A/E No.: F01951	Drawing No.: 31231007		Page 4 / 4		
Store No.: 06110		P.O. Number:			Date Required:		Date Shipped:		Vendor : Safetran Systems Corp.	
Qty.	Class-Item-CD	UI	Price per Item	Total Price	Item Description	Quantity Shipped	Quantity Installed		Quantity Returned (Credit)	Special Instructions
2	670-806648-4	EA	\$56.42	\$112.84	SIGN, X-BUCK, LESS HARDWARE, SAFETRAN 035200-X CR 02-490546		Date Quan.	Date Quan.		
2	670-751511-4	EA	\$35.58	\$71.17	SIGN, "1" TRACK, LESS HARDWARE SAFETRAN# 035207-1X					
2	670-006438-4	EA	\$10.54	\$21.08	TAPE, 4" X 96" REFLECTIVE APPLY TO BACK OF X-BUCK SIGN. ONLY IN IA., IN., IL., AL. 035200-555X					
1	670-330382-4	RL	\$10.75	\$10.75	TAPE, THOR 3" DURATEC, ORANGE 1000' LENGTHS. "WARNING STOP DIGGING"					
5	670-478560-4	EA	\$19.47	\$97.35	TERMINAL BLOCK, ERICO 4 POST P/N B2700A2C1WH W/HARDWARE LESS LIGHTNING ARRESTOR					
1	610-065626-4	EA	\$16.66	\$16.67	ULTRA-TECH 15206-01 CONNECTIVITY BLOCK FOR GRS B1 RELAY					
1	670-007238-4	EA	\$137.14	\$137.14	UNIT, THE INSTALLATION AND WIRING OF A DEVICE WHICH REQUIRE A MINIMUM OF FOUR WIRE CONNECT-					
1	670-258957-4	EA	\$25,580.50	\$25,580.50	WIRED RACK, 6X6 FARADAY, 20AMP SINGLE TRK SSCCIIIA, GCP3000D2, 2 CRAGG CHARGER, 2 RELAY RACKS, SAFTRAN P/N 20A 1TRK, USE WITH I/S 670-281280-4 W/CABLE CHUTES BEHIND THE FARADAY SHIELD					
1	450-986008-4	EA	\$7.35	\$7.35	WRENCH, TEST POST TYPE B DWG 55393-3, GR.1					

Total Material \$67,389.01

APPROVED BY STATE	APPROVED BY RAILROAD	CAR NUMBER	SEAL NUMBER
-------------------	----------------------	------------	-------------

E x 5 B-4, p. 6



Arne Skrodal
Signal Design Officer
Signals & Communications

Canadian National Railway
17641 South Ashland Avenue
Homewood, Illinois 60430-1339

708-332-3271
708-332-3514 Fax

April 14, 2004
Kankakee, IL - PF

Mr. Gus B. Bankieris
Manager Highway Crossing Signal Engineer
Norfolk Southern Railway Co.
99 Spring St.
Atlanta, GA 30303

Dear Mr. Bankieris:

Attached are several copies of the estimate dated April 8, 2004 in the amount of \$105,080 and track plan for the necessary signal work by CN forces to install CWT through the interlocking plant at Kankakee, IL. The NS crossings proposed to be upgraded are Entrance Ave., Schuyler Ave. and Indiana Ave.

Sincerely,

cc: G. L. Paris

ILLINOIS CENTRAL RAILROAD
ENGINEERING DEPARTMENT
SIGNALS AND COMMUNICATIONS

Kankakee, IL

Est 1007-401

Estimated cost of Signal work to provide two (2) crossing starts for
Norfolk Southern Railway within Interlocking limits.

Central Division

Val Sec IL-1

ICC ACCT	ITEM DESCRIPTION	QUANT.	UNIT	UNIT COST	TOTAL COST
	BCR				

	ADDITIONS AND BETTERMENTS				

	INSTRUMENT CASE, LOW DOUBLE	2.	EACH	3050.00	6100.00
	CASE PIER, AP-392	4.	EACH	70.00	280.00
	GCP3000D2, 80110-111	1.	EACH	18946.00	18946.00
	GCP3000D2, 80110-113	1.	EACH	21184.00	21184.00
	RECORDER INTERFACE, 80025	2.	EACH	250.00	500.00
	RELAY, ST, 500 OHM, 400004	5.	EACH	583.00	2915.00
	RECTIFIER, NRS, 20A	2.	EACH	429.00	858.00
	RECTIFIER, NRS, 5V5A	2.	EACH	238.00	476.00
	NARROW BAND SHUNT, 62775-3497	2.	EACH	431.00	862.00
	DUAL WIDE BAND SHUNT, 8A077	2.	EACH	334.00	668.00
	ADJUSTABLE INDUCTOR, 8A398-6	2.	EACH	400.00	800.00
	BATTERY CHOKE, 8A065A	2.	EACH	212.00	424.00
	BATTERY, NI-CAD, 165AH	20.	EACH	118.00	2360.00
	WIRE, 2c/6 TW	300.	FEET	0.29	87.00
	CABEL, 5c/14	1200.	FEET	0.36	432.00
	MISC. SIGNAL MATERIAL	1.	L.S.	2000.00	2000.00
	5 MAN GANG	8.	DAY	1100.00	8800.00
	PRELIMINARY ENGINEERING	1.	L.S.	5000.00	5000.00
	CONSTRUCTION ENGINEERING	1.	L.S.	275.00	275.00

Kankakee, IL

Est 1007-401

SUMMARY A&B

MATERIAL	58892.00 *
ACCT. HDLG. FRT. TRANSP. 0.14	8244.88
LABOR	8800.00 *
ENGINEERING	5275.00
LABOR ADDITIVE 0.8904	7835.52
ENGINEERING ADDITIVE 0.4132	2479.25
SUBSISTENCE	2400.00
RENTAL OF EQUIPMENT	1600.00
CONTINGENCIES	9553.35

TOTAL A&B	105080.00