

**ORIGINAL**

**STATE OF ILLINOIS  
ILLINOIS COMMERCE COMMISSION  
STIPULATED AGREEMENT 1330**

708-0088

This Agreement made and entered into, by and between the State of Illinois acting by and through the Illinois Commerce Commission ("Commission"), CSX Transportation, Inc. ("Company"), Noble Township Road District ("Township"), and the State of Illinois, Department of Transportation ("Department" or "IDOT").

**WITNESSETH:**

WHEREAS, it has come to the attention of the Commission through application for assistance from the Grade Crossing Protection Fund that inquiry should be made into the matter of improving public safety at the Ridge Road (TR 60) highway-rail grade crossing of the Company's track near Noble, in Richland County, Illinois, designated as crossing AAR/DOT #152 877T, milepost 225.88; and

WHEREAS, proper investigation has been made of the circumstances surrounding the subject crossing by a representative of the Commission's Transportation Division Railroad Section; and

WHEREAS, the physical aspects, including geometrics of the intersection, train movements, vehicular traffic volume, and sight distances and other pertinent data relating to the crossing have been obtained and shown on Exhibit A, attached to this Agreement; and

WHEREAS, the parties are mutually agreeable to accomplish proposed improvements to the crossing upon determination of the Commission by Order.

NOW, THEREFORE in consideration of the premises and of the mutual covenants and agreements as hereinafter contained the parties pray that the Commission enter an Order according to the provisions of Section 18c-7401 of the Illinois Commercial Transportation Law, 625 ILCS 5/18(c)-7401, requiring that certain improvements as hereinafter stated be made and that the cost for the proposed improvements be divided among the parties according to law and that in the interest of the traveling public the Grade Crossing Protection Fund ("GCPF") of the Motor Fuel Tax Law ("MFT") be required to bear a substantial portion of the cost; To Wit the parties agree as follows:

Section 1 All improvements encompassed by this Agreement shall be made in accordance with all applicable State laws, rules, standards, regulations and orders and procedures in general.

Section 2 The parties are of the opinion that the following improvements in the interest of public safety at the aforesaid crossing should be:

- (a) Installation of automatic flashing light signals and gates controlled by constant warning time (CWT) circuitry, by the Company.
- (b) Installation of temporary STOP signs at the Ridge Road crossing within 30 days of a Commission Order for the installation of new automatic

**DOCKETED**

warning devices, by the Company.

- (c) Reconstruction of the highway approach grades to meet the minimum requirements of 92 Ill. Adm. Code 1535, by the Township.

**Section 3** The Company has prepared detailed drawings, circuit plans, required specifications and a preliminary cost estimate to accomplish the proposed safety improvements, which may be required by Commission Order. The drawings, circuit plans, specifications, and cost estimate(s) are attached and incorporated herein by reference as Exhibit B.

Richland County, on behalf of the Township has prepared a preliminary cost estimate to accomplish the proposed Ridge Road improvements, which may be required by Commission Order. The cost estimate is attached and incorporated herein by reference as Exhibit C.

**Section 4** The Company and Township shall upon Order, according to the requirements contained therein, proceed toward the completion of the proposed improvements, accomplishing the work with its own forces or appropriate contracted services and agrees that an appropriate time for the completion of the proposed improvements should be twelve (12) months from the date of a Commission Order approving this Agreement.

**Section 5** The parties agree that an equitable division of cost for the proposed improvements is as follows:

**- COST DIVISION TABLE -**

<b>IMPROVEMENT</b>	<b>EST. COST</b>	<b>GCPF</b>	<b>TOWNSHIP</b>	<b>COMPANY</b>
Install Automatic Flashing Light Signals and Gates, controlled by CWT Circuitry	\$177,862	95% \$168,969 <sup>1</sup>	\$0	Remainder <sup>2</sup> \$8893
Modify Existing Highway Approaches	\$1578.80	\$0	100% <sup>4</sup>	\$0
Install temporary STOP Signs, if ordered	No Estimate Required	\$0	\$0	100% <sup>3</sup>
<b>TOTALS</b>	<b>\$179,441</b>	<b>\$168,969</b>	<b>\$1579</b>	<b>\$8893</b>

**Notes:**

<sup>1</sup> Total Grade Crossing Protection Fund (GCPF) assistance not to exceed \$168,969; any installation costs above the estimated amount of \$177,862 will be divided between the GCPF and the Company in the same percentages noted above, upon submittal and review of evidence to support the additional cost and subject to approval by the Commission

<sup>2</sup> Company responsible for all future operating and maintenance costs associated with the new automatic warning devices.

<sup>3</sup> Company responsible for all future maintenance costs associated with the temporary STOP Signs.

<sup>4</sup> Township responsible for all future maintenance costs associated with the highway approaches.

**Section 6** The Township is financially able and willing to bear an equitable portion of the cost for the proposed improvements as may be assigned by the Order and indicates this intent by Resolution incorporated herein by reference as Exhibit D. The Township shall submit a certified copy of the Resolution at the same time as the Execution Page of this Agreement is submitted to the Commission.

Section 7 Special Provisions: Since the approach grade improvements at the subject crossing will be performed by Township, flagging and contractor liability insurance will be required for said work.

The Company and Township shall complete and submit the Project Manager Information portion of the Project Status Report sheet, attached as Exhibit E and E1, along with this executed Agreement.

The Company and Township shall, at six (6) month intervals from the date of the Commission Order approving this Agreement, each submit to the Director of Processing and Information, Transportation Bureau of the Commission, a Project Status Report, attached as Exhibits E and E1, respectively, regarding the progress each has made toward completion of the work required by this Agreement. Each Project Status Report shall include the Commission Order's docket number, the Order date, the project completion date as noted in the Order, crossing information (inventory number and railroad milepost), type of improvement, and the name, title, mailing address, phone number, facsimile number, and electronic mailing address of the Company and Township Project Manager.

All bills for work specified in Section 2 of this Agreement authorized for reimbursement from the Grade Crossing Protection Fund shall be submitted to the Fiscal Control Unit, Bureau of Local Roads and Streets, Illinois Department of Transportation, 2300 S. Dirksen Parkway, Springfield, IL 62764. The Department shall send a copy of all invoices to the Director of Processing and Information, Transportation Bureau of the Commission. All bills shall be submitted no later than twelve (12) months from the completion date specified in the Commission Order approving this Agreement. The final bill for expenditures from each party shall be clearly marked "Final Bill". The Department shall not obligate any assistance from the Grade Crossing Protection Fund for the cost of proposed improvements described in this Agreement without prior approval by the Commission. The Commission shall, at the end of the 12<sup>th</sup> month from the completion date specified in the Commission Order approving this Agreement, or any Supplemental Order(s) issued for this project, conduct a review to determine if any unused assistance from the Grade Crossing Protection Fund should be deobligated. Upon completion of the review, the Commission shall notify the Department to deobligate all residual funds accountable for installation costs for this project. Notification may be by regular mail, electronic mail, fax, or phone.

SECTION 8 Billing: For all work specified in Section 2 of this Agreement, and authorized by an Order of the Commission, The Company shall assure that sufficient documentation for all bills is made available for review by the Department of the Department's representative. The minimum documentation that must be made available is outlined below:

- a) Labor Charges (including additives) - Copies of employee work hours charged to the Company account code for the project.
- b) Equipment Rental - Copies of rental agreements for the equipment used, including the rental rate; number of hours the equipment was used and the Company account code for the project.
- c) Material - An itemized list of all materials purchased and installed at the

- crossing location. If materials purchased are installed at multiple crossing locations, a notation must be made to identify the crossing location.
- d) Engineering - Copies of employee work hours charged to the Company account code for the project.
  - e) Supervision - Copies of employee work hours charged to the Company account code for the project.
  - f) Incidental Charges - An itemized list of all incidental charges along with a written explanation of those charges.
  - g) Service Dates - Invoice shall include the beginning and ending date of the work accomplished for the invoice.
  - h) Final or Progressive - Each invoice shall be marked as a Progressive or a Final Invoice.
  - i) Reference Numbers - Each invoice shall include the AAR/DOT number, the ICC Order number and the state job number when federal funds are involved.
  - j) Locations - Each invoice shall show the location, with the street name and AAR/DOT crossing inventory number.

Section 9 This Agreement shall be binding upon the parties hereto, their successors or assigns. Upon execution of this Agreement by all parties, the Commission shall enter an appropriate Order, within 60 days accepting or rejecting such stipulation according to the provisions contained herein.

In Witness Whereof, the parties have caused this Agreement to be executed by their duly authorized officers, as of the dates indicated on their respective Execution Pages, attached hereto.

Executed by the Commission this 1<sup>st</sup> day of April, 2008.



Michael E. Stead  
Rail Safety Program Administrator

Attest:



John Saladino  
Rail Safety Specialist

Illinois Commerce Commission Stipulated Agreement 1330, executed by Commission Staff on April 1, 2008, concerning improvements at the Ridge Road highway-rail grade crossing of CSX Transportation's track near Noble, Richland County, designated as crossing AAR/DOT #152 877T, railroad milepost 225.88.

Executed by Noble Township Road District this 4 day of April, 2008.

NOBLE TOWNSHIP ROAD DISTRICT

By: Ray Hancock

Attest:

Gary Ulm

RECEIVED  
APR 1 2008

Illinois Commerce Commission  
RAIL SAFETY SECTION

Illinois Commerce Commission Stipulated Agreement 1330, executed by Commission Staff on April 1, 2008, concerning improvements at the Ridge Road highway-rail grade crossing of CSX Transportation's track near Noble, Richland County, designated as crossing AAR/DOT #152 877T, railroad milepost 225.88.

Executed by CSX Transportation, Inc. this 16<sup>th</sup> day of May, 2008.

CSX TRANSPORTATION, INC.

By: Dale W. Ophardt

Dale W. Ophardt  
Chief Engineer  
Design, Construction & Capacity

Attest:

Paul R. Atkinson

Illinois Commerce Commission Stipulated Agreement 1330, executed by Commission Staff on April 1, 2008, concerning improvements at the Ridge Road highway-rail grade crossing of CSX Transportation's track near Noble, Richland County, designated as crossing AAR/DOT #152 877T, railroad milepost 225.88.

Executed by the Illinois Department of Transportation this 30<sup>th</sup> day of May, 2008.

STATE OF ILLINOIS  
DEPARTMENT OF TRANSPORTATION

By: Christine M. Reed  
Christine M. Reed, Director of Highways

**ILLINOIS COMMERCE COMMISSION  
STIPULATED AGREEMENT  
CROSSING DATA FORM**

**GENERAL INFORMATION:** See Location Sketch

<b>RAILROAD</b>	CSX
<b>USDOT#, MILEPOST</b>	152 877T, 225.8
<b>STREET, CITY, COUNTY</b>	Ridge Road [TR 60] near Noble, Richland County
<b>JURISDICTION (RDWY)</b>	Noble Township
<b>LOCATION</b>	Rural
<b>STREET SURFACE</b>	17' Gravel, Fair Condition

**CROSSING DATA:** See Location Sketch for roadway profile and track centers

<b>TRACK (W-E or N-S)</b>	<b>SURFACE TYPE</b>	<b>SURFACE WIDTH</b>	<b>SURFACE CONDITION</b>
Main	Epton rubber & asphalt.	24'	Fair

**ROADWAY DATA:** See Location Sketch

<b>INTERSECTING ROADS:</b>	None
<b>TRAFFIC CONTROL</b>	None
<b>ADT &amp; SPEED</b>	75 Vehicles Per Day @ 55 MPH (unposted)
<b>TRAFFIC TYPE</b>	Passenger, School Buses, Hazardous Materials, [All possible]
<b>ADVANCE WARNING</b>	Yes
<b>PAVEMENT MARKING</b>	No

**RAILROAD DATA:** See Location Sketch

<b>FREIGHT TRAFFIC</b>	19 Per day @ 60 MPH, Day & Night? Yes
<b>PASSENGER TRAFFIC</b>	None
<b>WARNING DEVICES</b>	Crossbucks

**NOTES:**

**VISIBILITY STUDY:** See Location Sketch

<b>Train Speed</b>	60	<b>MPH</b>
<b>Roadway Speed</b>	55	<b>MPH</b>
<b>Required Stopping Sight Distance (SSD)</b>		
<b>Along Roadway</b>	518	<b>FEET</b>
<b>Along Tracks</b>	647	<b>FEET</b>
<b>Required Clearing Sight Distance (CSD) (Along Tracks)</b>	1,441	<b>FEET</b>

Distances calculated per American Association of State Highway and Transportation Officials (AASHTO), A Policy on Geometric Design of Highways and Streets, 2001, Fourth Edition.

<b>QUADRANT</b>	<b>CSD (FT)</b>	<b>OBSTRUCTION</b>	<b>SSD (FT)</b>	<b>OBSTRUCTION</b>
<b>NE</b>	Ok*		50'*	Berm/Trees
<b>NW</b>	Ok*		200'*	Trees/#
<b>SE</b>	Ok*		50'*	Crops
<b>SW</b>	Ok*		*	#


\*Note: The installation of automatic flashing light signals and gates eliminate the need to satisfy minimum Sight Distance criteria.

**APPROACH GRADES:** See Location Sketch


<b>DIRECTION: EAST/NORTH</b>			<b>DIRECTION: WEST/SOUTH</b>		
<b>DISTANCE (FT)</b>	<b>ELEVATION (FT)</b>	<b>GRADE (%)</b>	<b>DISTANCE (FT)</b>	<b>ELEVATION (FT)</b>	<b>GRADE (%)</b>

Distance measured from outermost rail.

**COMMENTS:** # Stopping sight distance unrestricted at time of inspection. Field with crops down. If corn were in field, SSD would be restricted.

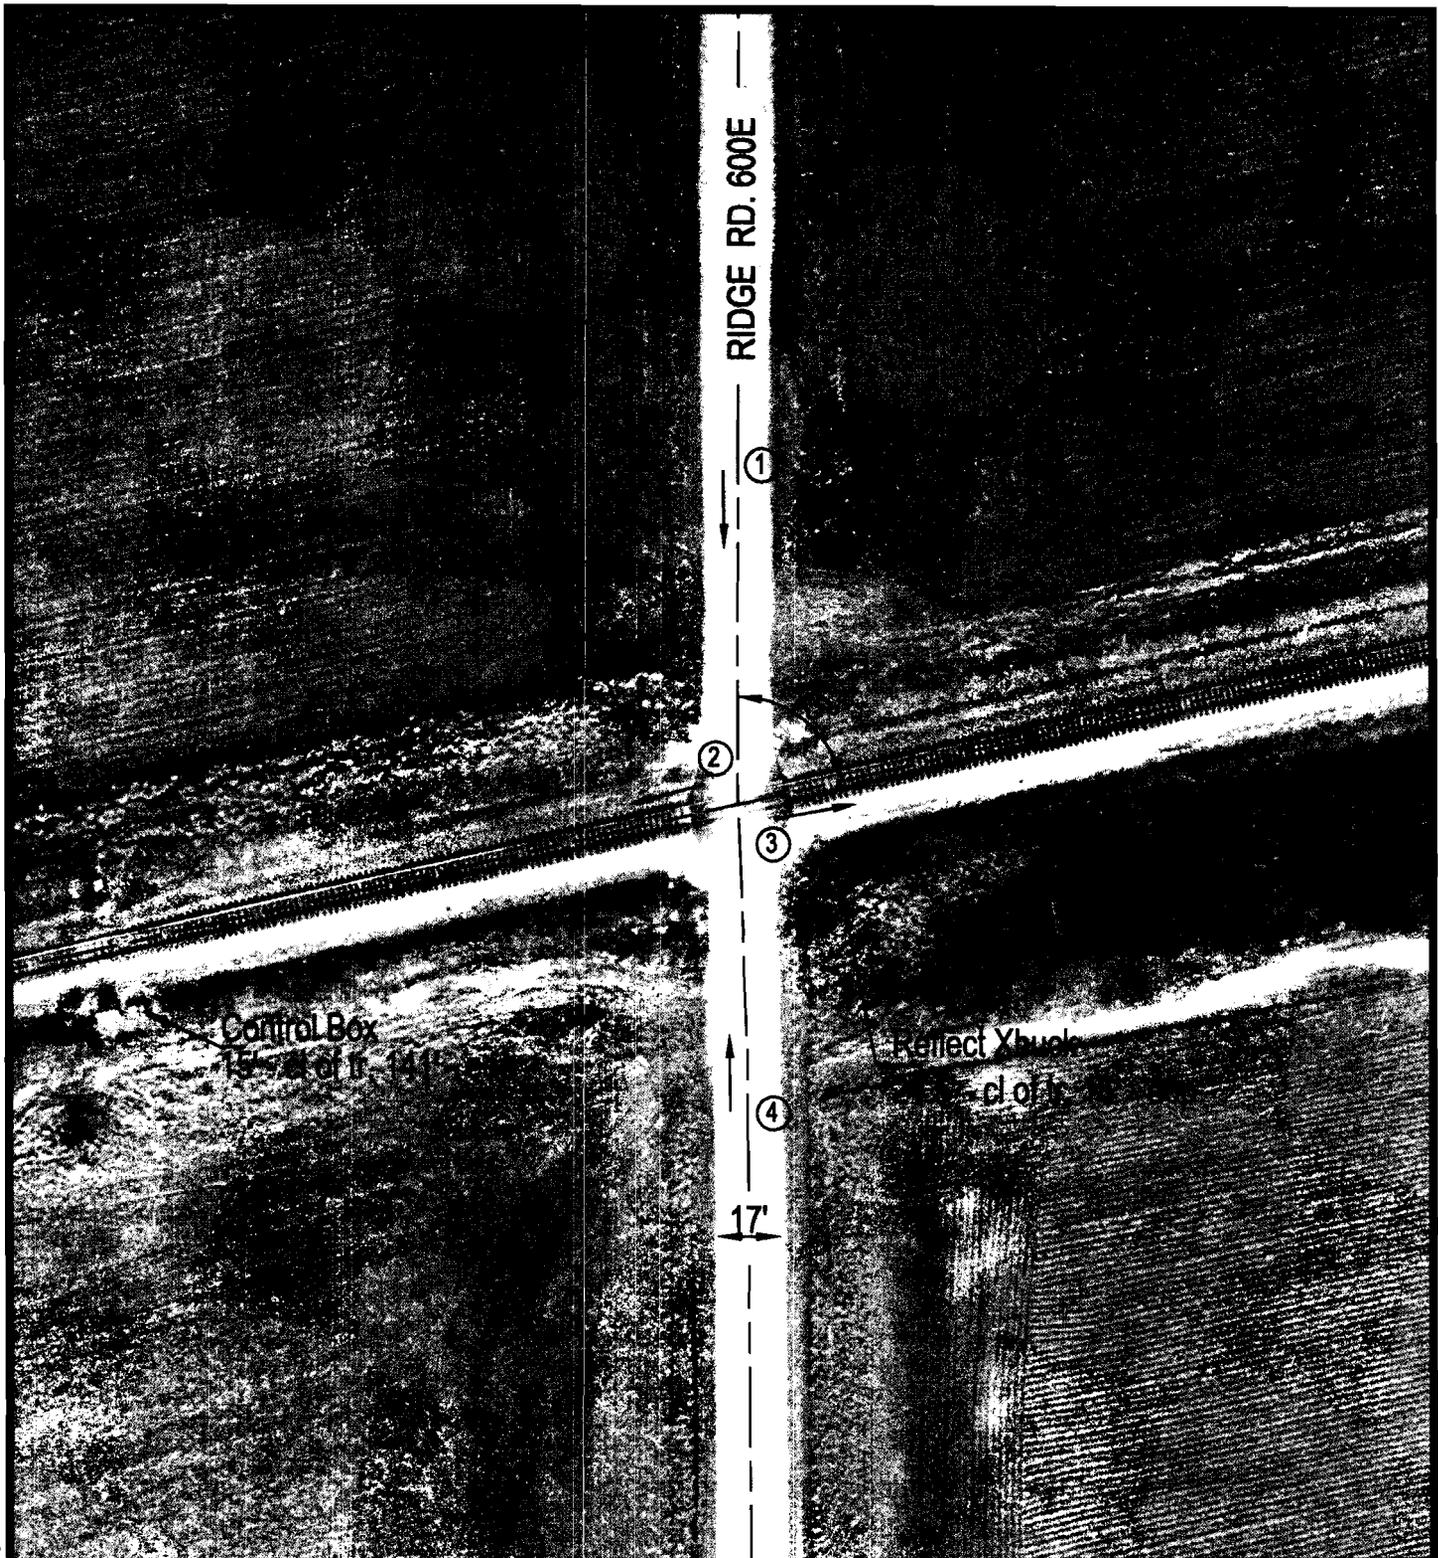

J:\RICHLAND\152877T\152877T.DWG 06/21/00 13:51 JTC

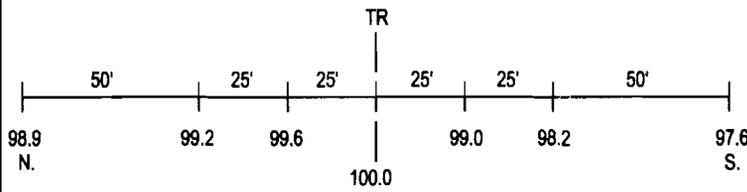

ROAD PROFILE



③ Photo Location

Crossing #: 152877T  
 Location: Richland Co., City of Noble (N)  
 Lat/Long: 38°42'13" / 88°11'10"  
 Railroad: CSX  
 Street: Ridge Rd. 600E  
 Railroad Milepost: 225.88  
 Crossing Protection: Signs



500 Water St  
13<sup>th</sup> Floor  
Jacksonville, FL 32202  
EMAIL Hal\_Gibson@csx.com  
PHONE (904) 359-1048  
FAX (904) 366-4042

**Hal A. Gibson, Jr.**  
Principal Engineer, Public Projects

March 28, 2008

Michael Stead  
Illinois Commerce Commission  
527 E. Capital Ave, Springfield, Il 62701  
Springfield, IL 62701

Subject: Noble, Richland County, IL; Install automatic flashing light signals & gates at Ridge Road, DOT 152877T, MP BC 225.88, OP # IL0228

Mr. Stead:

As defined in your letter dated November 14, 2007, CSXT has prepared plans and an estimate for the proposed signal work for the above referenced project. Enclosed for your review and approval is the Signal Force Account Estimate in the amount of \$177,862.00.

We await receipt of your further advice and/or approval of the project cost and authority to proceed. If I can be of any further assistance, please do not hesitate to contact me.

Thank you,

A handwritten signature in black ink, appearing to read "Hal A. Gibson, Jr.", written over a horizontal line.

Hal A. Gibson, Jr.

Enclosure

cc: S. Pugh, Louisville, KY (as information)  
Agreements-DOT (as information)  
B. Biesterveld (as information)

**CSX TRANSPORTATION, INC.  
FORCE ACCOUNT ESTIMATE**

ACCT. CODE : 709 - IL0228

**ESTIMATE SUBJECT TO REVISION AFTER:** 9/24/2008 **DOT NO.:** 152877T  
**CITY:** Noble **COUNTY:** Richland **STATE:** IL  
**DESCRIPTION:** Install automatic flashing lights and gates at Ridge Road  
**DIVISION:** Midwest Division **SUB-DIV:** Illinois **MILE POST:** BC-225.88  
**AGENCY PROJECT NUMBER:**

**PRELIMINARY ENGINEERING:**

200 Labor (Non Contract)		\$	1,350
200 Additive	42.41%	\$	573
230 Expenses		\$	235
212 Contracted & Administrative Engineering Services		\$	500
<b>Subtotal</b>		\$	<b>2,658</b>

**CONSTRUCTION ENGINEERING/INSPECTION:**

200 Labor (Non Contract)		\$	-
200 Additive	42.41%	\$	-
230 Expenses		\$	-
212 Contracted & Administrative Engineering Services		\$	500
<b>Subtotal</b>		\$	<b>500</b>

**FLAGGING SERVICE: (Contract Labor)**

070 Labor (Conductor-Flagman)		\$	-
050 Labor (Foreman/Inspector)		\$	-
070 Additive	74.68% (Transportation Department)	\$	-
050 Additive	76.03% (Engineering Department)	\$	-
230 Per Diem (Engineering Department)		\$	-
230 Expenses		\$	-
<b>Subtotal</b>		\$	<b>-</b>

**SIGNAL & COMMUNICATIONS WORK:** (Details Attached) \$ 155,224

**TRACK WORK:** (Details Attached) \$ -

**ACCOUNTING & BILLING:**

040 Labor		\$	2,000
040 Additive	65.54%	\$	1,311
<b>Subtotal</b>		\$	<b>3,311</b>

**PROJECT SUBTOTAL**

900 **CONTINGENCIES:** 10.00% \$ 16,169

**GRAND TOTAL \*\*\*\*\*** \$ 177,862

**DIVISION OF COST:**

Agency	100.00%	\$	177,862
Railroad		\$	-
<b>TOTAL *****</b>		\$	<b>177,862</b>

**NOTE: Estimate is based on FULL CROSSING CLOSURE during work by Railroad Forces.**

This estimate has been prepared based on site conditions, anticipated work duration periods, material prices, labor rates, manpower and resource availability, and other factors known as of the date prepared. The actual cost for CSXT work may differ based upon the agency's requirements, their contractor's work procedures, and/or other conditions that become apparent once construction commences or during the progress of the work

Office of Assistant Chief Engineer Public Projects--Jacksonville, Florida

Estimated prepared by: Hal A. Gibson, Jr.

DATE: 3/28/2008 REVISED:

**CSX TRANSPORTATION, INC.  
FORCE ACCOUNT ESTIMATE**

Page 2 of 7

ACCT. CODE : 709 - IL0228  
Pub EB - IL EB3 (IL)

<b>ESTIMATE SUBJECT TO REVISION AFTER:</b>	<b>9/24/2008</b>	<b>DOT NO.:</b> 152877T
<b>CITY:</b> Noble	<b>COUNTY:</b> Richland	<b>STATE:</b> IL
<b>DESCRIPTION:</b> Install automatic flashing lights and gates at Ridge Road		
<b>DIVISION:</b> Midwest Division	<b>SUB-DIV:</b> Illinois	<b>MILEPOST:</b> BC-225.88
<b>DRAWING NO.:</b> BC22588.H01	<b>DRAWING DATE:</b> 2/4/2008	<b>REGION:</b>
<b>AGENCY PROJECT NUMBER:</b>		

**PRELIMINARY ENGINEERING:**

200	Labor (Non Contract)		<u>5</u> Days @	\$ <u>270.00</u>	\$	1,350
200	Additive	42.41%			\$	573
230	Expenses				\$	235
212	Contracted & Administrative Engineering Services				\$	500
	<b>Subtotal</b>				\$	<u>2,658</u>

**CONSTRUCTION ENGINEERING/INSPECTION:**

200	Labor (Non Contract)		<u>0</u> Days @	\$ <u>270.00</u>	\$	-
200	Additive	42.41%			\$	-
230	Expenses				\$	-
212	Contracted & Administrative Engineering Services				\$	500
	<b>Subtotal</b>				\$	<u>500</u>

**FLAGGING SERVICE: (Contract Labor)**

70	Labor (Conductor-Flagman)		<u>0</u> Days @	\$ -	\$	-
50	Labor (Foreman/Inspector)		<u>0</u> Days @	\$ <u>235.00</u>	\$	-
70	Additive	74.68% (Transportation Department)			\$	-
50	Additive	76.03% (Engineering Department)			\$	-
230	Expenses	(Engineering Department)	<u>0</u> Days @	\$ <u>75.00</u>	\$	-
230	Expenses		<u>0</u> Days @	\$ <u>45.00</u>	\$	-
	<b>Subtotal</b>				\$	<u>-</u>

**COMMUNICATIONS WORK:**

	Temporary (Details Attached)				\$	-
	Permanent (Details Attached)				\$	-
	<b>Subtotal</b>				\$	<u>-</u>

**CSX TRANSPORTATION, INC.  
FORCE ACCOUNT ESTIMATE**

ACCT. CODE : 709 - IL0228  
Pub EB - IL EB3 (IL)

**TRACK: LABOR**

50	Traffic Control	0	MAN-HRS	\$ 21.00	\$ -
50	Remove Existing Crossing	0	MAN-HRS	\$ 21.00	\$ -
50	Renew Cross Ties	0	MAN-HRS	\$ 21.00	\$ -
50	Renew Rail	0	MAN-HRS	\$ 21.00	\$ -
50	Install OTM	0	MAN-HRS	\$ 21.00	\$ -
50	Install Field Welds	0	MAN-HRS	\$ 21.00	\$ -
50	Install Geo-Textile Fabric	0	MAN-HRS	\$ 21.00	\$ -
50	Install Sub-Drains	0	MAN-HRS	\$ 21.00	\$ -
50	Install Ballast	0	MAN-HRS	\$ 21.00	\$ -
50	Line and Surface	0	MAN-HRS	\$ 21.00	\$ -
50	Install Crossing Materials	0	MAN-HRS	\$ 21.00	\$ -
50	Install Bituminous Pavement	0	MAN-HRS	\$ 21.00	\$ -
50	_____	0	MAN-HRS	\$ 21.00	\$ -
50	_____	0	MAN-HRS	\$ 21.00	\$ -
50	Clean-Up	0	MAN-HRS	\$ 21.00	\$ -
50	Additive 76.03%				\$ -
230	Per Diem	0	MAN-DAY	\$ 90.00	\$ -
	<b>Subtotal</b>				<b>\$ -</b>

**TRACK: MATERIAL**

220	Cross Ties, Main Line	0	EA	\$ 31.00	\$ -
220	Rail, 136RE, New	0	LF	\$ 17.00	\$ -
220	Misc. OTM	1	LOT	\$ -	\$ -
210	Geo-Textile Fabric	0	RL	\$ 250.00	\$ -
210	Sub-Drains	0	LF	\$ 6.00	\$ -
220	Ballast	0	NT	\$ 5.75	\$ -
220	Field Welds	0	EA	\$ 100.00	\$ -
	_____	0	_____	\$ -	\$ -
	_____	0	_____	\$ -	\$ -
210	Concrete Full Width	0	TF	\$ 225.00	\$ -
210	Concrete/Rubber Xing (CSX)	0	TF	\$ 135.00	\$ -
210	Rubber Crossing, Full Depth	0	TF	\$ 280.00	\$ -
210	Timber/Asphalt Crossing (CSX Standard)	0	TF	\$ 42.00	\$ -
220	Crossties, 10' Length	0	EA	\$ 39.00	\$ -
210	Bituminous Material	0	NT	\$ 80.00	\$ -
210	Sales Tax on Material 6.50%				\$ -
210	Material Handling 5.00%				\$ -
	<b>Subtotal</b>				<b>\$ -</b>

**CONTRACT:**

215	Asphalt Paving (In Place)	0	NT	\$ 120.00	\$ -
241	Disposal of Waste Materials	0	TF	\$ 10.00	\$ -
215	Maintenance of Traffic	0	DAY	\$ 300.00	\$ -
	<b>Subtotal</b>				<b>\$ -</b>

**CSX TRANSPORTATION, INC.  
FORCE ACCOUNT ESTIMATE**

ACCT. CODE : 709 - IL0228  
Pub EB - IL EB3 (IL)

241	<b><u>EQUIPMENT RENTAL:</u></b>					
	<b>Subtotal</b>				\$	-
50	<b><u>WORK TRAIN:</u></b>	0	DAY	\$ 2,100.00	\$	-
	<b>Subtotal</b>				\$	-
	<b><u>SALVAGE:</u></b>					
228	Rail	0	NT	\$ 65.00	\$	-
228	OTM	0	NT	\$ 75.00	\$	-
	<b>Subtotal</b>				\$	-
	<b><u>SIGNAL WORK:</u></b>					
210	Material - Field & Consumables				\$	63,186
210	Material - Sales Tax				\$	4,107
220	Material - Shop				\$	-
60	Construction Labor				\$	17,897
65	Shop Labor				\$	800
230	Per Diem				\$	7,035
200	RR Engineering, Preliminary				\$	4,084
200	RR Engineering, Construction				\$	2,684
60	Additives to Construction Labor				\$	13,607
65	Additives to Shop Labor				\$	705
200	Additives to Engineering				\$	2,870
241	Equipment Expense				\$	9,750
241	Waste Management				\$	180
212	Contract Engineering				\$	13,620
211	Freight				\$	4,700
216	AC Power Service				\$	-
228	Salvage				\$	(1)
900	Other - Extend Culvert				\$	10,000
	<b>Subtotal</b>				\$	155,224
	<b><u>ACCOUNTING &amp; BILLING:</u></b>					
40	Labor	10	Days @	\$ 200.00	\$	2,000
40	Additive	65.54%			\$	1,311
	<b>Subtotal</b>				\$	3,311
	<b><u>PROJECT SUBTOTAL:</u></b>				\$	161,692
900	<b><u>CONTINGENCIES:</u></b>	10.00%			\$	16,169
	<b>GRAND TOTAL *****</b>				\$	177,862

**CSX TRANSPORTATION, INC.  
FORCE ACCOUNT ESTIMATE**

ACCT. CODE : 709 - IL0228  
Pub EB - IL EB3 (IL)

**DIVISION OF COST:**

Agency	100.00%	\$	177,862
Railroad	0.00%	\$	-
<b>TOTAL</b> .....		\$	<b>177,862</b>

**NOTE: Estimate is based on FULL CROSSING CLOSURE during work by Railroad Forces.**

This estimate has been prepared based on site conditions, anticipated work duration periods, material prices, labor rates, manpower and resource availability, and other factors known as of the date prepared. The actual cost for CSXT work may differ based upon the agency's requirements, their contractor's work procedures, and/or other conditions that become apparent once construction commences or during the progress of the work

Office of Assistant Chief Engineer Public Projects--Jacksonville, Florida

Estimated prepared by: Hal A. Gibson, Jr.

DATE: 3/28/2008 REVISED:

Estimate No. 113372  
**CSX Transportation**  
 Ridge Road - Install automatic FLS&G  
 Noble, IL

DOT: 152877T

OP: IL0228

CSX Project: IL2008001

**Summary**

---

Material .....	\$ 63,186
Sales Tax .....	\$ 4,107
 Labor:	
Construction Labor (67 man-days).....	\$ 17,897
Shop Labor (5 man-days).....	\$ 800
Subsistence (67 man-days).....	\$ 7,035
 Railroad Engineering, Preliminary .....	 \$ 4,084
Railroad Engineering, Construction .....	\$ 2,684
 Additives to Construction Labor .....	 \$ 13,607
Additives to Shop Labor .....	\$ 704
Additives to Engineering .....	\$ 2,870
 Equipment Expenses (15 work days).....	 \$ 9,750
 Waste Management (15 work days).....	 \$ 180
 Contract Engineering .....	 \$ 13,620
 Freight .....	 \$ 4,700
 Poleline Removal .....	 \$ 0
 AC Power Service .....	 \$ 0
 Salvage .....	 \$ -1
 Extend Culvert .....	 \$ 10,000
 <hr/>	
TOTAL ESTIMATE COST .....	 \$ 155,224

---

Date: 03/20/2008

Estimated By: Warren Wroten

NOTE: This estimate should be considered void one year from date of estimate.

**Shop Material List for CSX Project: IL2008001 (Effective: 03/20/2008)  
Install automatic FLS&G  
Noble, IL - BC 225.88**

Catalog Num	Cond	Unit Price	Qty	Cost	Description
020-0003386	1	6781.00	1	6781.00	HOUSE 6X6L ALUM INCLUDES 5 SHELFs, FARADAY CLOSET, 240V
020-0017120	1	11.00	6	66.00	BLOCK TERMINAL 12 POST SINGLE STRIP AAR 14.1.6 WITH 1 AAR
020-0017125	1	3.54	6	21.24	BLOCK TERMINAL 2 POST AAR 14.1.8 WITH 1 AAR 14.1.11
020-0018234	1	30.69	1	30.69	CABLE CONVERTER PROTOCOL/MEDIA WAYSIDE ACCESS
020-0021965	1	8.96	1	8.96	EXTRACTOR DWG 59688-4 TERMINAL GRS CAT P3-308 REF
020-0022651	1	41.58	1	41.58	PLUGBOARD KIT TYPE B1 OR ST1 RELAY ASSEMBLY WITH 12 EACH
020-0022701	1	65.00	25	1625.00	ARRESTER LPC 15012-1 0-30V DC OR 0-24V AC RATED AT 15 AMP
020-0025595	1	17.42	1	17.42	WRENCH DWG 55393-3 GR1 "E" TERMINAL POST NUT GRS CAT
020-0053360	1	415.52	3	1246.56	CHARGER BATTERY ELC 12/20 S 20 AMP 10-19.9 VDC ROTARY SW
020-0053510	1	233.11	1	233.11	KIT 240V AC EMERGENCY GENERATOR CABLE AND
020-0055602	1	11.39	1	11.39	RELAY POTTER BRUMFIELD KHAU17D12-12V 160 OHMS
020-0056514	1	9.32	4	37.28	SOCKET RELAY POTTER & BRUMFIELD 27E166 NEWARK
020-0064060	1	16.12	2	32.24	PLATE MOUNTING FOR 2 TYPE KHAU RELAY SOCKETS ON GRS B1
020-0660077	1	568.96	1	568.96	ARRESTER GE 9L10KAC213 FOR 240 VOLT SINGLE PHASE 3 WIRE
020-0770060	1	12.66	8	101.28	ARRESTER US&S N451552-0201 TRACK SERIES RED LABEL USGA
020-0770105	1	22.40	2	44.80	ARRESTER HARMON 202217-000 AGE-1 TRACK AIR GAP EQUALIZER
020-1940055	1	8.50	1	8.50	CONTAINER CIRCUIT PRINT 24" SCHEDULE 20 4" PVC PIPE WITH
020-2503079	1	477.60	2	955.20	MODULE SAFETRAN GROUND FAULT DETECTOR (A80297-2) USED WITH
020-2503090	1	839.79	1	839.79	CONVERTER PROTOCOL/MEDIA WAYSIDE ACCESS GATEWAY (WAG)
020-2503200	1	768.82	1	768.82	KIT SAFETRAN GCP-4000 ILOD PKG. FOR USE WITH SEAR-III
020-2503202	1	1064.85	1	1064.85	KIT SAFETRAN GCP-4000 KEY DOWN PACKAGE ADDS REMOTE KEY
020-2503210	1	14133.99	1	14133.99	PREDICTOR SAFETRAN GCP-4000 2-TRACK DUAL CASE W/RECORDER
020-2901190	1	11.39	3	34.17	RELAY POTTER BRUMFIELD KHAU17A12-120 3900 OHMS
020-3430130	1	316.80	1	316.80	RELAY SAFETRAN 400023 500 OHMS CONTACTS 6FB HEAVY DUTY
020-3652615	1	30.36	1	30.36	RESISTOR ADJUSTABLE 0.340 TO 3.00 OHMS 2.24A 15W SAFETRAN

**Shop Material List for CSX Project: IL2008001 (Effective: 03/20/2008)**  
**Install automatic FLS&G**  
**Noble, IL - BC 225.88**

Catalog Num	Cond	Unit Price	Qty	Cost	Description
020-4200100	1	6.04	2	12.08	CONNECTOR BUS 1" CENTERS 1/2" X 36" 18 GAGE PUNCHED 1/4" X
020-4200340	1	1.48	8	11.84	LINK TEST ASSEMBLY 1" CENTERS COMPLETE WITH INSULATED
020-4200350	1	2.04	14	28.56	LINK TEST ASSEMBLY 2-3/8" CENTERS COMPLETE WITH
020-8000067	1	14.49	2	28.98	LOCK AMERICAN H10SIGRA CSX SIGNAL PADLOCK WITH BLACK
022-8005160	1	586.77	1	586.77	KIT CDMA AND VHF RADIO MATERIAL FOR USE WITH CSX
<b>Total Cost: \$</b>				<b>29,688.22</b>	

**Field Material List for CSX Project: IL2008001 (Effective: 03/20/2008)**  
**Install automatic FLS&G**  
**Noble, IL - BC 225.88**

Catalog Num	Cond	Unit Price	Qty	Cost	Description
020-0013686	1	40.43	3	121.29	BOOTLEG KIT CSX RAIL CONN W/15 FT 3/16 IN BDSTRAND 6/64
020-0013908	1	6.98	300	2094.00	CABLE UG COMPOSITE 19 CONDUCTOR INCLUDES 13
020-0025145	1	465.70	4	1862.80	SHUNT ENCLOSURE INTERRAIL P/N IRS-SE8A WAYSIDE MOUNT
020-0052475	1	11.20	4	44.80	ARM EXTENSION 10-1/2" ALUM WITH 3/8" DIAMETER MOUNTING
020-0053220	1	2.52	150	378.00	CABLE POWER UG 3 COND NO 6 AWG, SHOW LENGTH ON EACH
020-0054075	1	1052.70	2	2105.40	GATE GARD NORMAL MOVEMENT COMPLETE WITH SHEAR PIN AND
020-0055421	1	18.61	6	111.66	BRACKET SIGN 4" OR 5" MAST W/1/2" U-BOLT FOR ALL SIGNS
020-0056028	1	247.01	2	494.02	SHUNT SAFETRAN 8A077 DUAL WIDE BAND
020-0056674	1	4934.13	2	9868.26	SIGNAL 0220-L GCWD GATE ASSY DWG SS222 INCLS 18 FBRGL ARM
020-0057275	1	1.18	350	413.00	WIRE UG TRACK TWISTED PAIR NO. 6 AWG SOLID CONDUCTOR
020-1040322	1	168.00	30	5040.00	BATTERY SAFT SPL165, 165 AH POCKET PLATE NICKEL CADMIUM
020-1040540	1	26.88	4	107.52	TRAY BATTERY FIBER CO 82687-1-P 12" WIDTH 24" LONG
020-1040550	1	39.20	1	39.20	TRAY BATTERY FIBER CO 82687-3-P 12" WIDTH 38"
020-1360014	1	751.26	1	751.26	PACKAGE FOREMANS CARE FOR ALUMINUM TYPICAL BOM FOR USE
020-1360016	1	20.60	1	20.60	PACKAGE SAFETY & SECURMENT WITH 1 EA CAUTION TAG 1 EA
020-2500630	1	235.91	2	471.82	SHUNT SAFETRAN 62775-348 NARROW BAND 348HZ
020-2503077	1	369.08	1	369.08	BELL SAFETRAN ELECTRONIC BELL AND SENSOR UNIT (A80301-2)
020-2503078	1	114.39	2	228.78	MODULE SAFETRAN GATE TIP SENSOR (A80281-2) USE WITH
020-2503092	1	20.93	2	41.86	KIT GATE TIP SENSOR RETAINING BRACKET INSTALLATION KIT,
020-3901895	1	84.00	2	168.00	TIP FLEX HWY CROSSING GATE 24 IN LONG RED & WHITE STRIPES
020-3930010	1	3.70	2	7.40	KIT GATE ARM WARNING STICKER KIT INCLUDES 1-EA 5"X3"
020-4200340	1	1.48	29	42.92	LINK TEST ASSEMBLY 1" CENTERS COMPLETE WITH INSULATED
020-4200900	1	0.22	6	1.32	CONNECTOR SHEATHING AMP 329860 FOR NO. 14 WIRE
020-4201042	1	0.20	40	8.00	NUT HEX BINDING (RSA NUT) AAR 14.1.11-6 14-24 NS-2 THD CONE
020-4201043	1	0.18	250	45.00	NUT HEX CLAMP (FLAT NUT) AAR 14.1.11-7 14-24 NS-2 THD FLAT

Field Material List for CSX Project: IL2008001 (Effective: 03/20/2008)  
Install automatic FLS&G  
Noble, IL - BC 225.88

Catalog Num	Cond	Unit Price	Qty	Cost Description
020-4201044	1	0.10	200	20.00 WASHER AAR 14.1.11 ROUND COPPER NICKEL PLATED FOR AAR
020-9999991	1	100.00	1	100.00 BLOCKING AND BRACING FOR PROJECTS BURCO DIST
250-0001827	1	13.49	1	13.49 BREAKER CIRCUIT SQ D QO235
360-0006100	1	35.07	1	35.07 STOOL STEP WOOD 14"X 20" SIGNAL MAINTAINERS CSXT
360-0800145	1	4.25	1	4.25 BROOM WAREHOUSE CORN HVY DUTY ID300
<b>Total Cost: \$</b>				<b>25,008.8</b>

**Consumables List for CSX Project: IL2008001 (Effective: 03/20/2008)**  
**Install automatic FLS&G**  
**Noble, IL - BC 225.88**

Catalog Num	Cond	Unit Price	Qty	Cost	Description
N/A		500.00	1	500.00	CELLULAR MODEM RAVEN AIR LINK COMMUNICATIONS
N/A		50.00	65	3250.00	FILL MATERIAL, 1 CUBIC YARD
N/A		800.00	1	800.00	WALKWAY ROCK, 10 CUBIC YARDS
020-0017605	1	0.29	350	101.50	WIRE CASE 10 AWG FLEX CSX SPEC SS796 OKONITE
020-0017607	1	0.71	500	355.00	WIRE CASE TW PR NO 10 AWG FLEX CSX SPEC SS796 TWIST 2
020-0017625	1	0.43	150	64.50	WIRE CASE TW PR NO 14 AWG FLEX CSX SPEC SS796 TWIST 2
020-0017630	1	0.13	200	26.00	WIRE CASE NO 16 AWG FLEX CSX SPEC SS796 FURN 1000 FT SPOOL
020-0017635	1	0.80	130	104.00	WIRE SIGNAL DEL 018 NO 6 COPPER STRANDED SINGLE
020-0028610	1	0.41	100	41.00	TERMINAL RING AMP 35628 YELLOW PLASTI-BOND HVY DUTY
020-1710045	1	3.13	250	782.50	CONDUIT SDR 13.5 4" POLYETHYLENE TRENCHLESS
020-2060072	1	666.40	2	1332.80	FOUNDATION HELICAL SCREW-IN ASSEMBLY 7' X 10" COMPLETE
020-2060074	1	476.00	2	952.00	EXTENSION 10" X 3' USE WITH XING GATE AND SIGNAL MAST
020-3261970	1	9.41	2	18.82	DECAL ASSY 2" BLACK PRESSURE SENSITIVE VINYL PRE-MASKED
020-4200880	1	0.53	2	1.06	CONNECTOR TERMINAL 2-3/8" CENTERS AAR 14.1.15-4 NICKEL
020-4200892	1	0.44	27	11.88	CONNECTOR TERMINAL 1" CENTERS AAR 14.1.15-3 NICKEL PLATED
020-4251190	1	0.47	120	56.40	TERMINAL RING AMP 35627 BLACK PLASTI-BOND WIRE SIZE 10-12
020-4251290	1	0.59	30	17.70	TERMINAL WIRE AMP 322051 BLUE WIRE SIZE NO 6 AWG 1/4" STUD
020-4251295	1	0.71	6	4.26	TERMINAL WIRE AMP 322007 BLUE WIRE SIZE NO 6 AWG 3/8" STUD
020-9999992	1	50.00	1	50.00	HOUSE, SIGNAL HANDLING CHARGE, BURCO DISTRIBUTION
450-0019212	1	0.20	100	20.00	SCREW 10 X 1" SHT METAL PAN HD TYPE A COARSE THREAD
<b>Total Cost: \$</b>				<b>8,489.42</b>	

ACCT. CODE : 709 - IL0228  
 Pub EB - IL EB3 (IL)

**ESTIMATE SUBJECT TO REVISION AFTER:** 9/24/08 **DOT NO.:** 152877T  
**CITY:** Noble **COUNTY:** Richland **STATE:** IL  
**DESCRIPTION:** Install automatic flashing lights and gates at Ridge Road  
**DIVISION:** Midwest Division **SUB-DIV:** Illinois **MILEPOST:** BC-225.88  
**DRAWING NO.:** BC22588.H01 **DRAWING DATE:** 2/4/2008 **REGION:**  
**AGENCY PROJECT NUMBER:**

Amount		
Task	Task Desc	Total
40	Labor General Office	\$3,311
50	Labor Roadway	
60	Labor Signal	\$31,504
65	Labor Signal1	\$1,505
70	Labor Transportation	
200	Labor NonContract	\$11,561
210	Invoice Material	
	Material - Field & Consu	\$67,293
211	Invoice Freight	\$4,700
212	Invoice Contract Eng	\$14,620
215	Invoice Misc	
216	Invoice Utilities	
220	Material New	
	Material - Shop	
228	Scrap Credit	-\$1
230	ExpenseRpts	\$7,270
241	Invoice Rental	\$9,930
900	Other	\$10,000
900	Contingencies	\$16,169
	Material New	
<b>Grand Total</b>		<b>\$177,862</b>

ACCT. CODE : 709 - IL0228  
 Pub EB - IL EB3 (IL)

---


ESTIMATE SUBJECT TO REVISION AFTER: 9/24/2008 DOT NO.: 152877T  
 CITY: Noble COUNTY: Richland STATE: IL  
 DESCRIPTION: Install automatic flashing lights and gates at Ridge Road

DIVISION: Midwest Division SUB-DIV: Illinois MILEPOST: BC-225.88  
 DRAWING NO.: BC22588.H01 DRAWING DATE: 2/4/2008  
 AGENCY PROJECT NUMBER:

---

**SIGNAL WORK:**

210 Material - Field & Consumables	\$	63,186
210 Material - Sales Tax	\$	4,107
220 Material - Shop	\$	-
60 Construction Labor	\$	17,897
65 Shop Labor	\$	800
230 Per Diem	\$	7,035
200 RR Engineering,Preliminary	\$	4,084
200 RR Engineering,Construction	\$	2,684
60 Additives to Construction Labor	\$	13,607
65 Additives to Shop Labor	\$	705
200 Additives to Engineering	\$	2,870
241 Equipment Expense	\$	9,750
241 Waste Management	\$	180
212 Contract Engineering	\$	13,620
211 Freight	\$	4,700
216 AC Power Service	\$	-
228 Salvage	\$	(1)
900 Other - Extend Culvert	\$	10,000
<b>Subtotal</b>	<b>\$</b>	<b>155,224</b>

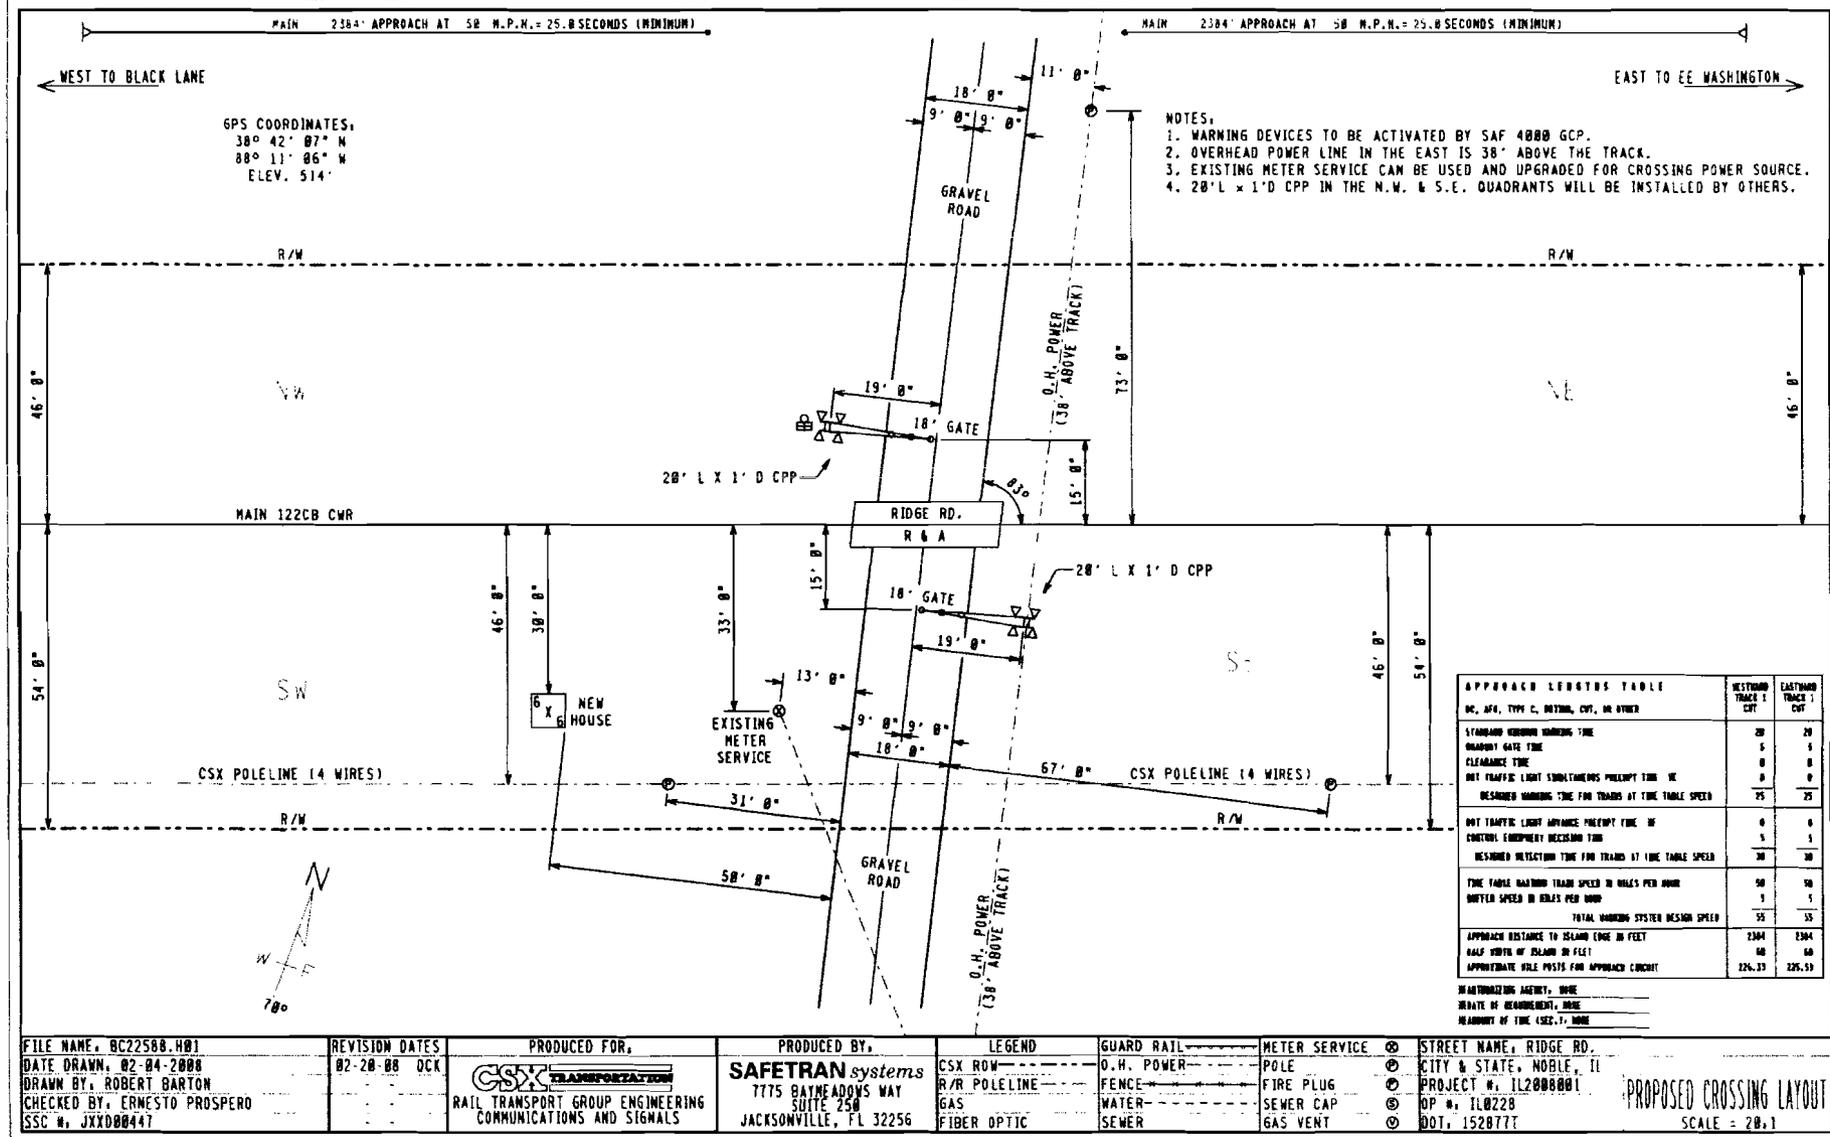

GPS COORDINATES:  
 38° 42' 07" N  
 88° 11' 06" W  
 ELEV. 514'

- NOTES:
1. WARNING DEVICES TO BE ACTIVATED BY SAF 4000 GCP.
  2. OVERHEAD POWER LINE IN THE EAST IS 38" ABOVE THE TRACK.
  3. EXISTING METER SERVICE CAN BE USED AND UPGRADED FOR CROSSING POWER SOURCE.
  4. 20" L x 1" D CPP IN THE N.W. & S.E. QUADRANTS WILL BE INSTALLED BY OTHERS.

APPROACH LENGTHS TABLE	WESTWARD TRACK 1 CUT	EASTWARD TRACK 1 CUT
DC, AFD, TYP C, DISTING, CWT, OR OTHER		
STANDARD WARNING WARNING TIME	20	20
WARNING GATE TIME	5	5
CLEARANCE TIME	0	0
DOT TRAFFIC LIGHT SIMULTANEOUS PHASING TIME (S)	0	0
DESIGNED WARNING TIME FOR TRAINS AT TIME TABLE SPEED	25	25
DOT TRAFFIC LIGHT ADVANCE PREEMPT TIME (S)	0	0
CONTROL ELEMENTARY DECELERATION TIME	5	5
DESIGNED DETECTION TIME FOR TRAINS AT TIME TABLE SPEED	30	30
TIME TABLE WARNING TRAIN SPEED IN MILES PER HOUR	50	50
WARNING SPEED IN MILES PER HOUR	5	5
TOTAL WARNING SYSTEM DESIGN SPEED	55	55
APPROACH DISTANCE TO ISLAND END IN FEET	2304	2304
HALF WIDTH OF ISLAND IN FEET	60	60
APPROXIMATE POLE POSITS FOR APPROACH CIRCUIT	226.33	226.33

FILE NAME: BC22588.H01  
 DATE DRAWN: 02-04-2008  
 DRAWN BY: ROBERT BARTON  
 CHECKED BY: ERNESTO PROSPERO  
 SSC #: JXXD00447

REVISION DATES  
 02-20-08 DCK

PRODUCED FOR:  
  
 RAIL TRANSPORT GROUP ENGINEERING  
 COMMUNICATIONS AND SIGNALS

PRODUCED BY:  
**SAFETRAN systems**  
 7775 BAYMEADOWS WAY  
 SUITE 250  
 JACKSONVILLE, FL 32256

LEGEND  
 CSX ROW  
 R/R POLELINE  
 GAS  
 FIBER OPTIC

GUARD RAIL  
 O.H. POWER  
 FENCE  
 WATER  
 SEWER

METER SERVICE  
 POLE  
 FIRE PLUG  
 SEWER CAP  
 GAS VENT

STREET NAME, RIDGE RD.  
 CITY & STATE, NOBLE, IL  
 PROJECT #: IL2008001  
 DP #: IL02278  
 DOT: 1528777

PROPOSED CROSSING LAYOUT  
 SCALE = 20:1

# RICHLAND COUNTY HIGHWAY DEPARTMENT

OLNEY, ILLINOIS

**DANNY J. COLWELL, PE**  
County Engineer

**SHELBY J. WEIDNER**  
Office Manager

Estimate of Cost:

Project Description:

Improve approach roadway to comply with ICC design standard.

Project Location:

CSX Railroad Crossing of Noble Township Road District Road TR60 (Ridge Road)  
Richland County, IL  
AAR/DOT: 152877T  
Milepost 225.88

Materials:

CA6 crushed stone surface coarse aggregate delivered and spread: 50 tons @ \$20.00 per ton

Equipment:

Cat 12G motor grader: 4 hours @ \$51.70 per hour

Labor:

Equipment operator: 4 hours @ \$18.00 per hour


Construction Inspection and Supervision:

County Engineer: 4 hours @ \$75.00 per hour

Estimate Total = \$1,578.80

Respectfully Submitted By: *Danny J. Colwell* 3/28/08  
Danny J. Colwell, P.E., Richland County Engineer Date

My License Expires November 30<sup>th</sup>, 2009

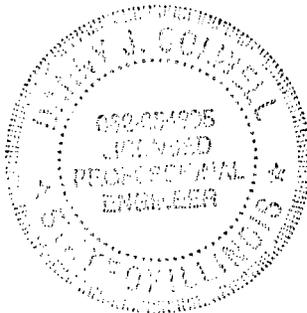

ILLINOIS COMMERCE COMMISSION  
STIPULATED AGREEMENT 1330

Date 4-12-08

The Noble Township Road District Board meeting on 4-12-08,  
(Date)

resolved to authorize Ray Hancock  
(Name, Office)

to act as its designated agent in the processing of this Stipulated Agreement and that the Noble Township Road District is financially willing and able to pay a portion of the cost for the proposed improvements as outlined in Section 2 of this Agreement.

**ILLINOIS COMMERCE COMMISSION  
TRANSPORTATION DIVISION / RAIL SAFETY SECTION**

**PROJECT STATUS REPORT:**

TYPE: (CHECK ONE)

PROGRESS	<input checked="" type="checkbox"/>
COMPLETION	<input type="checkbox"/>

DATE	5/16/2008
------	-----------

**PROJECT INFORMATION:**

Reporting Party:	CSX
Docket/Order #; Date:	708 0088
Status Reports Due:	
Ordered Completion Date:	
Completion Report Due <sup>1</sup> :	
AAR/DOT#, Milepost:	152 877T, 225.88
Street, (in/near) City, County:	Ridge Road/TR 60 near Noble, Richland County
Railroad Company:	CSX Transportation, Inc.

<sup>1</sup>Completion reports involving changes to the railroad crossing must include an updated USDOT Inventory Form.

**PROJECT MANAGER INFORMATION<sup>2</sup>:**

Name:	Hal Gibson
Title:	Public Project Engineer
Representing:	CSX Transportation, Inc.
Street Address:	500 Water Street
City, State, Zip:	Jacksonville, Florida 32202
Office Phone:	904 359-1048
Office Fax:	904 366-4042
Cellular Phone:	
E-Mail Address:	hal_gibson@csx.com

<sup>2</sup>Project Manager Information to be submitted by Roadway Authority and Railroad Company

**DESCRIPTION OF IMPROVEMENT(S) ORDERED:**

- Install new automatic flashing light signals and gates controlled by constant warning time circuitry.
- Install temporary STOP signs.

**STATUS OF WORK:**

**ILLINOIS COMMERCE COMMISSION  
TRANSPORTATION DIVISION / RAIL SAFETY SECTION**

Mail directed to the **Rail Safety Section** or the **Director of Processing and Information**, Transportation Bureau of the Commission should be addressed to:

The Illinois Commerce Commission  
527 East Capitol Avenue  
Springfield, IL 62701-1827

If you have questions contact:

John Saladino, Rail Safety Specialist  
Phone: (217) 785-8423  
Email: [jsaladino@icc.illinois.gov](mailto:jsaladino@icc.illinois.gov)

A **Form 3** can be obtained from the Illinois Commerce Commission by calling 217/782-7660 or on the web at:

<http://www.icc.illinois.gov/formswizard.aspx>

The billing address for **Grade Crossing Protection Fund** reimbursement is:

**SIGNAL WORK**

Illinois Department of Transportation  
Fiscal Control Unit  
Bureau of Local Roads and Streets  
2300 South Dirksen Parkway  
Springfield, Illinois 62764

**APPROACH/BRIDGE WORK**

IDOT, District ##  
Address

**United States Department of Transportation Inventory Form #6180.71** can be obtained on the web at:

<http://safetydata.fra.dot.gov/OfficeofSafety/Forms/Default.asp>

Submit Inventory forms to:

Federal Railroad Administration Office of Safety 1120 Vermont Avenue, NW Washington, DC 20590	<b><u>And</u></b>	Chief of Data Services Illinois Department of Transportation 2300 S. Dirksen Parkway Springfield, IL 62764
--	-------------------	---

**ILLINOIS COMMERCE COMMISSION  
TRANSPORTATION DIVISION / RAIL SAFETY SECTION  
PROJECT STATUS REPORT:**

**TYPE:** (CHECK ONE)

PROGRESS	<input type="checkbox"/>
COMPLETION	<input type="checkbox"/>

DATE	6-12-08
------	---------

**PROJECT INFORMATION:**

Reporting Party:	Noble Township Road District
Docket/Order #; Date:	708-0088
Status Reports Due:	
Ordered Completion Date:	
Completion Report Due <sup>1</sup> :	
AAR/DOT#, Milepost:	152 877T, 225.88
Street, (in/near) City, County:	Ridge Road/TR 60 near Noble, Richland County
Railroad Company:	CSX Transportation, Inc.

<sup>1</sup>Completion reports involving changes to the railroad crossing must include an updated USDOT Inventory Form.

**PROJECT MANAGER INFORMATION<sup>2</sup>:**

Name:	Ray Hancock
Title:	Highway Commissioner
Representing:	Noble Township Road District
Street Address:	2816 N. Ridge Road
City, State, Zip:	Noble, IL 62868
Office Phone:	
Office Fax:	
Cellular Phone:	
E-Mail Address:	

<sup>2</sup>Project Manager Information to be submitted by Roadway Authority and Railroad Company

**DESCRIPTION OF IMPROVEMENT(S) ORDERED:**

- Improve the highway approach grades so that they conform to 92 Illinois Administrative Code 1535.

**STATUS OF WORK:**

**ILLINOIS COMMERCE COMMISSION  
TRANSPORTATION DIVISION / RAIL SAFETY SECTION**

Mail directed to the **Rail Safety Section** or the **Director of Processing and Information**, Transportation Bureau of the Commission should be addressed to:

The Illinois Commerce Commission  
527 East Capitol Avenue  
Springfield, IL 62701-1827

If you have questions contact:

John Saladino, Rail Safety Specialist  
Phone: (217) 785-8423  
Email: [jsaladino@icc.illinois.gov](mailto:jsaladino@icc.illinois.gov)

A **Form 3** can be obtained from the Illinois Commerce Commission by calling 217/782-7660 or on the web at:

<http://www.icc.illinois.gov/formswizard.aspx>

The billing address for **Grade Crossing Protection Fund** reimbursement is:

**SIGNAL WORK**

Illinois Department of Transportation  
Fiscal Control Unit  
Bureau of Local Roads and Streets  
2300 South Dirksen Parkway  
Springfield, Illinois 62764

**APPROACH/BRIDGE WORK**

IDOT, District ##  
Address

**United States Department of Transportation Inventory Form #6180.71** can be obtained on the web at:

<http://safetydata.fra.dot.gov/OfficeofSafety/Forms/Default.asp>

Submit Inventory forms to:

Federal Railroad Administration Office of Safety 1120 Vermont Avenue, NW Washington, DC 20590	<b>And</b>	Chief of Data Services Illinois Department of Transportation 2300 S. Dirksen Parkway Springfield, IL 62764
--	------------	---