M. GINGERICH, GEREAUX & ASSOCIATES

February 22, 2002

Illinois Commerce Commission
Transportation Division/Rail Safety Section
Mr. Joe Von DeBur
527 East Capitol Avenue
Springfield, IL 62701

Fax # 217-785-7404

Re: DOT 288 9395, MP53.85, North Street, Bradley, IL
     MG^{2}A Project #2001

Dear Mr. Von DeBur,

The Village of Bradley is interested in participating in the Improvements to extend the
West concrete median, East approximately 15 feet. The following is an estimated cost to
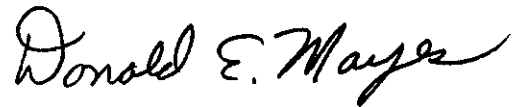extend this median required of the Village.
    Estimated Construction Cost to extend median (see attached sketch) includes all
    labor, equipment, material, removal of existing median and debris as needed, and
    necessary traffic control.

Estimated Construction Cost	=	$2,000.00
Engineering	=	$ 500.00
Railroad Liability Insurance (if needed)	=	$1,500.00
Total Estimated Project Cost	=	**$4,000.00**

Please review the above cost information and let me know the procedure that we need to
follow for this work. The Village could have this work done immediately ahead of your
signal relocation work to avoid any conflicts with each contractor. The Village would be
looking for the 50% reimbursement, if not 100%, of all the cost accrued by this work.

— EXHIBIT C, Page 1 —

Contact me as soon as possible, so that we can coordinate this work and help maintain a safe grade crossing. If you have any questions, call me-Don Mayes (815) 939-4921.

Sincerely,

DONALD E. MAYES
Engineers Assistant/Technician

Enclosure
DEM/dr

Cc: Mayor Gerald Balthazor
       Mr. Carl Erickson

VILLAGE OF BRADLEY
PROPOSED CONCRETE MEDIAN EXTENTION OF WEST MEDIAN
ON NORTH STREET AT THE CANADIAN NATIONAL ILLINOIS CENTRAL
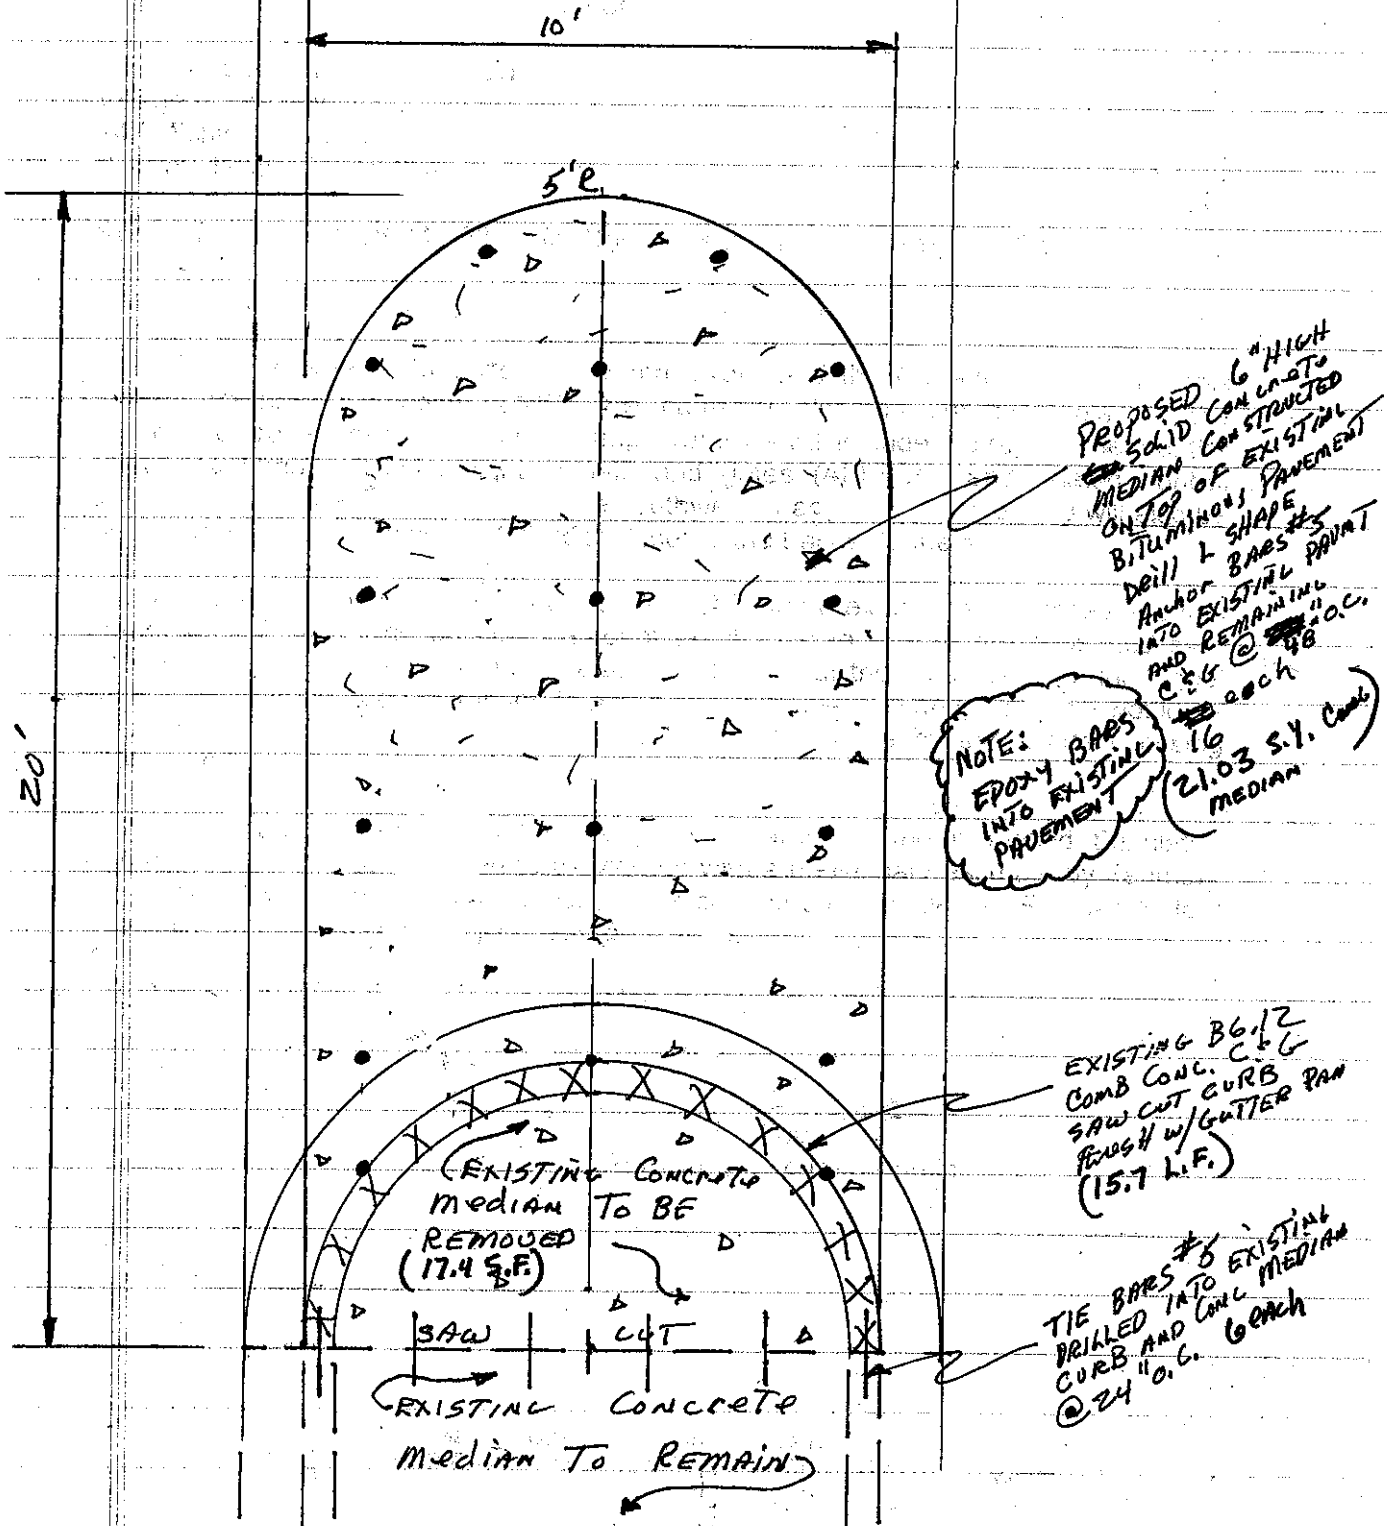RAILROAD GRADE CROSSING NEAR SECURITY LUMBER CO.

10'

5'e

20'

PROPOSED 6" HIGH
SOLID CONCRETE
MEDIAN CONSTRUCTED
ON TOP OF EXISTING
BITUMINOUS PAVEMENT
DRILL L SHAPE
ANCHOR BARS #3
INTO EXISTING PAVM'T
AND REMAINING
C&G @ 48" O.C.
16 each

NOTE:
EPOXY BARS
INTO EXISTING
PAVEMENT

21.03 S.Y. (conc)
median

EXISTING B6.12
COMB CONC. C&G
SAW CUT CURB
FLUSH W/ GUTTER PAN
(15.7 L.F.)

EXISTING CONCRETE
MEDIAN TO BE
REMOVED
(17.4 S.F.)

SAW   CUT

EXISTING   CONCRETE
MEDIAN TO REMAIN

TIE BARS #6 DRILLED INTO EXISTING
CURB AND CONC MEDIAN
@ 24" O.C. 6 each

- EXHIBIT C, Page 3 -

ILLINOIS COMMERCE COMMISSION
STIPULATED AGREEMENT NO. 969

Date _____

The _____
            (Board or Council of the City of Bradley)

meeting on _____, Resolved to authorize _____
                                                   (Name, Office)

to act as its designated agent in the processing of this Stipulated Agreement and that the **CITY OF BRADLEY** is financially willing and able to bear the cost for the proposed improvements as may be assigned to it according to Section 5 of this Agreement.